





CONTENTS

NEXTORCH®

SAINT TORCH SERIES	02-0
W SERIES	05-1
T & P SERIES	13-2
HUNTING SET	25-3
E SERIES	31-3
C SERIES	33-3
S SERIES	35-3
U SERIES	39-4
H SERIES	46-5
GLO-TOOB	53-5
ACCESSORIES	55-5
NEX BATON	59-6
HANDCUFFS	69-7
MULTI-TOOL	71
TACTICAL PEN	72
TEX SERIES	73-78
ADAPTATION	79-84



ICONS



USB Type-C Compatible

This device charges with the popular USB Type-C cable and any USB power source.



Power Bank Compatible

The battery pack can also be used as a power source to charge your devices.



STT (Smart Torch Technology)

Lights with this technology can be connected to a computer and their features programmed through NEXTUNER software.



USB Micro-B Compatible

This device can be charged with a USB Micro-B, also known as a Micro USB, cable and any USB power



Power Status Indication

The charge level of a flashlight's rechargeable battery can be checked with external LED indicators.



An abbreviation for "Save Our Ship," this is the traditional Morse code signal for distress. In flashlights, it is a mode that automatically flashes this code as a visual distress signal.



OSS (One-Step Strobe)

A flashlight switch that activates the light in momentary-on mode with light pressure and in strobe mode with heavy pressure.



Ceramic Glass Breaker

This product features a nanoceramic strike tip (or tips) that can be used to break glass in a vehicle or building



Flexible Battery Solutions

This flashlight can be powered by multiple types



DUO SWITCH

A switch design that activates multiple modes with a single button. Tap for momentary on, double tap for strobe, click for constant on, then tap to cycle through additional mode options.



The flashlight has a strobe function that strobes the light at 10-12 Hz to disorient your opponent and disrupt his vision so you can gain the advantage. The strobe can also be used as a signaling device.



360-degree Focus Adjustable

The flashlight has a focus-adjustable beam which can be adjusted by rotating the flashlight head through a full 360-degree range.



Multi-Light-Source Technology

The flashlight has multiple light sources. By rotating the flashlight head or an external dial, you can select the desired light source.



The weapon-mounted light features a laser (visible or infrared) that allows it to serve as an aiming device or sight for the firearm.



RSL Technology Inside

The bike light is equipped with NEXTORCH's Rectangular Spot Lens (RSL), which emits a 160-degree-wide beam in a rectangular spot pattern.





* HM30 Saint Torch Handle

* Waterproof Container

* Charger









* Shoulder Strap





* Carry Bag

* Waterproof Container

* Shoulder Strap

SAINT TORCH 30 V2.0

8,000-Lumen Ultra-Bright Rechargeable Searchlight





High-performance LED produces a maximum 8,000-lumen output for a beam distance of 530 meters

- * Switchable to six modes: Four brightness levels, strobe, and S.O.S.
- * Side-mounted switch for easy mode selection
- * Four-LED battery-level indicator
- * USB Type-C quick-charging design charges fully in 3 hours
- * Powered by a 4 x 2600 mAh rechargeable battery pack that doubles as a waterproof power bank
- Includes an accessory kit containing a charger, a shoulder strap, a waterproof case, and a sturdy nylon carry/storage bag



Light Source	LED
Modes	8000 lm / 2400 lm / 720 lm / 90 lm / strobe / S.O.S.
Runtime	2 h 15 min / 4 h / 7 h 30 min / 60 h / - / -
Beam Distance	530 m / 290 m / 160 m / 56 m / - / -
Waterproof	IPX7 (1 m / 3.28 feet)
Impact Resistance	1 m / 3.28 ft
Battery	4 x 2600 mAh (14.4 V) rechargeable battery pack (included)
Dimensions	200 mm × 84 mm × 50 mm / 7.87 x 3.31 x 1.97 in
Weight	743 g / 26.2 oz (with battery)

SAINT TORCH 11

3,500-Lumen Ultra-Long-Throw Rechargeable Searchlight








- * High-performance LED and specialized orange-peel reflector produce an extremely uniform beam for long-distance illumination
- * Maximum 3,500-lumen output achieves a beam distance of 600 meters
- * Switchable to six modes: Four brightness levels, strobe, and S.O.S.
- * Side-mounted switch for easy mode selection
- * Four-LED battery-level indicator
- * USB Type-C quick-charging design charges fully in 3 hours
- * Powered by a 4 x 2600 mAh rechargeable battery pack that doubles as a waterproof power bank
- Includes an accessory kit containing a charger, a shoulder strap, a waterproof case, and a sturdy nylon carry/storage bag





Light Source	LED
Modes	3500 lm / 1850 lm / 500 lm / 65 lm / strobe / S.O.S
Runtime	3 h / 3 h 30 min / 16 h / 110 h / - / -
Beam Distance	600 m / 470 m / 250 m / 105 m / - / -
Waterproof	IPX7 (1 m / 3.28 feet)
Impact Resistance	1 m / 3.28 ft
Battery	4 x 2600 mAh (14.4 V) rechargeable battery pack (included)
Dimensions	212 mm x 83 mm x 50 mm / 8.35 x 3.27 x 1.97 in
Weight	790 g / 27.87 oz (with battery)



- * Powered by a 6 x 4800 mAh rechargeable battery pack that doubles as a waterproof power bank
- bezel and automatically dims the light
- carry and usage options
- a waterproof case, and a sturdy nylon carry/storage bag



* Shoulder Strap

also functions as a power bank

Light Source	LED
Modes	20000 lm / 6000 lm / 1700 lm / 90 lm / strobe / S.O.S.
Runtime	2 h 15 min / 3 h 30 min / 8 h 30 min / 81 h / - / -
Beam Distance	740 m / 410 m / 212 m / 50 m / - / -
Waterproof	IPX7 (1 m / 3.28 feet)
Impact Resistance	1 m / 3.28 ft
Battery	6 x 4800 mAh rechargeable battery pack (included)
Dimensions	285 mm × 106 mm × 50 mm / 11.22 x 4.17 x 1.97 in
Weight	1500 g / 52.9 oz (with battery)








* Carry Bag







WL14 White light

500 LUMENS









WL22G Green laser

650 LUMENS

WL22R Red laser

650 LUMENS

Full Size handgun and long gun









WL13 White light

1300 LUMENS

WL23R Red laser 1300 LUMENS

WL23G Green laser

1300 LUMENS

Compact handgun













WL21R 650 LUMENS



WL21G Green laser 650 LUMENS



650 LUMENS

WL21 IR Infrared laser



400 LUMENS

Railed Rifles





WL60 White light + Laser





WL50 IR White light + IR

860 LUMENS



WL60

Dual-Function Weapon Light/Green Laser Sight











- * Remote switch design allows selective use of white light and laser
- * Switchable white light modes include high and low output and a choice of momentary, constant-on, and strobe functions
- * Quickly attaches to all standard Picatinny rails without the use of tools
- * Powered by either a 1 x 18650rechargeable battery (included) or 2 x CR123A batteries







Multi-Function Remote Switch

White Light and Green Laser

	White (High)	White (Low)	Green Laser
Modes	700 lm	100 lm	<5 mW
Runtime	1 h 30 min	12 h	40 h
Beam Distance	320 m	122 m	-
Impact Resistance	2 m / 6.56 ft		

Waterproof IPX7 (1 m / 3.28 feet) Battery 1 x 18650 rechargeable battery or 2 x CR123A 219 g / 7.73 oz (with battery) Weight 116 mm x 72 mm x 33 mm / 4.57 x 2.83 x 1.30 in Dimensions



Universal Rail-Mounted White Light/IR Weapon Light







- * Combines high-intensity white light and infrared (IR) illumination in a single weapon light
- * Switchable to four modes: Three brightness levels of white light and infrared illumination
- * Patented head design rotates to instantly switch between white light and laser
- * Remote switch allows momentary and constant-on operation
- * Quickly attaches to all standard Picatinny rails without the use of tools
- * Made of aerospace aluminum with a Type III hard-anodized finish
- * Powered by 2 x CR123A batteries (included) or 1 x 18650 rechargeable battery








Rotate Light Head to Switch Light Sources

White Light and Infrared

Attaches/detaches without tools

Light Source	LED					
	Battery		White Light		IR Light	
	0001004	High	Medium	Low	400 W	
Modes	2 × CR123A	860 lm	330 lm	140 lm	400 mW	
	1 × 18650	High	Medium	Low	200 14/	
	1 × 18030	750 lm	360 lm	150 lm	380 mW	
	2 × CR123A	1 h 30 min	1 h 30 min / 2 h 30 min / 5 h 30 min			
Runtime	1 × 18650	3 h 15 min	/ 5 h 15 min /	9 h 45 min	5 h 15 min	

Beam Distance	2 × CR123A	290 m / 951 ft		
beam distance	1 × 18650	260 m / 853 ft		
Waterproof	IPX7 (1 m / 3	X7 (1 m / 3.28 feet)		
mpact Resistance	1 m / 3.28 ft			
Shock Resistance	500 G			
Battery	2 × CR123A (included) / 1 × 18650			
Dimension	159 mm x 42 mm x 40 mm / 6.26 x 1.65 x 1.5			
Weight	195 g / 6.87 oz (without batteries)			

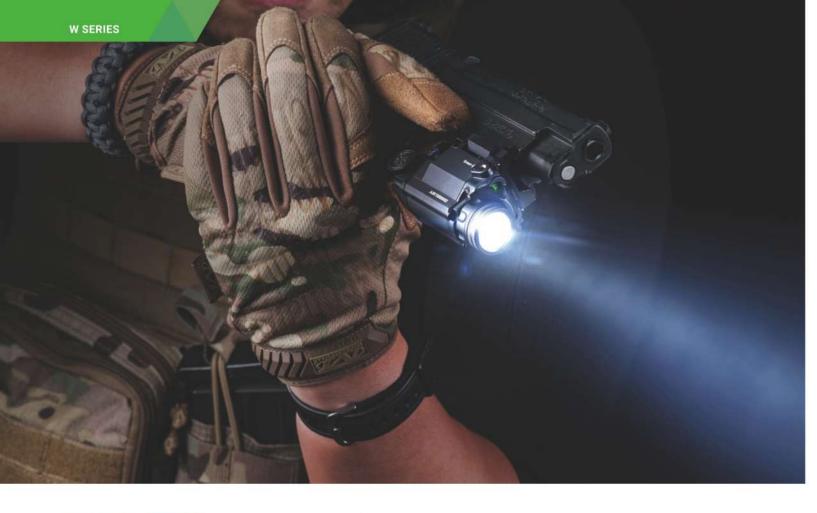



1,300-Lumen Ultra-Bright Weapon Light/Laser Sight











* Provides 1,300-lumen high-intensity white light and a 5 mW red or green laser sight (separate models)

* Patented mounting system quickly attaches to Picatinny and Glock rails without the use of tools

* Ambidextrous rotary switch allows easy activation of the white light

* Separate side switch selectively activates lasers

* Powered by 2 x CR123A batteries (included) or 2 x 16340 rechargeable batteries

Model WL23G Light Source White Light Modes Runtime 3 h 15 min 3 h 15 min 43 h Beam Distance Impact Resistance Waterproof 2 x CR123A(included) or 2 x 16340 rechargeable batteries Battery 82 mm x 36 mm x 49 mm / 3.23 x 1.42 x 1.93 in Dimensions Weight 108 g / 3.80 oz (without batteries)

WL30



3-in-1 Multi-Function Weapon Light/Laser Sight













Light Source	White Light	Green Laser	IR Laser		
Modes	400 lm	< 5 mW	< 5 mW		
Runtime	1 h 30 min	10 h	24 h		
Beam Distance	110 m	_	V=		
Impact Resistance	1 m / 3.28 ft				
Water Resistance		IPX4			
Battery	1 x CR123A (included)				
Dimensions	80 mm x 40 mm x 45 mm / 3.15 x 1.57 x 1.77				
Weight	115 g / 4.05 oz (without battery)				



1,300-Lumen Ultra-Bright Weapon Light









- * Produces ultra-bright 1300-lumen white light with a 180 m beam distance
- * Patent-pending ambidextrous rotary switch for momentary or constant-on
- * Patent-pending mounting system allows quick attachment to Picatinny or
- Accepts optional remote switches for use on long guns
- Powered by 2 x CR123A batteries

	Momentary on	Constant on		
Mode	1300 lm	1300 lm		
Runtime		3 h 15 min		
Beam Distance	180 m	180 m		
Impact Resistance	1 m / 3.28 ft			
Water Resistance	IPX	(7		
Battery	2 x CR123A	/ 2 x 16340		
Dimensions	82 mm x 36 mm x 39 mm / 3.23 x 1.42 x 1.5			
Weight	89 g / 3.13 oz (without batteries)			

* Combines high-intensity white light, a visible green laser, and an infrared (IR) laser in a single weapon light

- * Quickly attaches to all Picatinny or Glock rails without the use of tools
- * Ambidextrous Bi-paddle switch allows easy activation of the white light
- * Separate side switches selectively activate the green and IR lasers
- * Windage and elevation adjustments allow precise alignment of both lasers

WL21R/G/IR

2-in-1 Weapon Light/Laser Sight (Red, Green, or Infrared)







650 LUMENS



Combines high-intensity white light and a visible red or green laser or infrared (IR) illumination and an IR laser (separate models)

Patent-pending independent white-light and laser switches

* Ambidextrous rotary white-light switch for momentary or constant-on illumination * Separate side switches activate the laser

* Patent-pending mounting system allows quick, one-handed attachment to Picatinny or Glock rails

Windage and elevation adjustments allow precise alignment of laser

Powered by 1 x 16340 rechargeable battery (included) or 1 x CR123A battery

Model	WL2	21R	WL	21G	WL2	21IR
Light Source	White Light	Red Laser	White Light	Green Laser	IR Light	IR Laser
Modes	650 lm	< 5 mW	650 lm	< 5 mW	350 mW	< 5 mW
Runtime	1 h 30 min	15 h	1 h 30 min	10 h	6 h	30 h
Beam Distance	130 m	-	130 m	-	-	-
Impact Resistance	1 m / 3.28 ft					
Battery	1 x 16340rechargeable battery (included)or 1 x CR123A				123A	
Dimensions	76mm x 33 mm x 45 mm / 2.99 x 1.30 x 1.77 in					
Weight	108 g / 3.80 oz (without battery)					




650-Lumen Rechargeable Compact Weapon Light/Laser Sight





650 LUMENS



W SERIES

* Patent-pending mounting system quickly attaches to Picatinny and Glock rails without the use of tools

Powered by a built-in 250 mAh rechargeable lithium-ion battery with a USB Type-C port


Separate switches for selective white-light and laser activation

Compact, lightweight design is ideal for concealed carry

Windage and elevation adjustments allow precise laser alignment



WL14



Model WL2		WL22R		WL22G			
Light Source	White Light	Red Laser	White Light + Red Laser	White Light	Green Laser	White Light +Green Lase	
Modes	650 lm	< 5 mW	650 lm	650 lm	< 5 mW	650 lm	
Runtime	1 h	6 h 30 min	-	1 h	4 h 15 min	-	
Beam Distance	102 m		-	102 m	-	-	
Impact Resistance		1 m / 3.28 ft					
Waterproof		IP:					
Battery		Built-in 250mAh re			battery		
Dimensions	55 mm x 30 mm x 36 mm / 2.17 x 1.18 x 1.42 in				n		
Weight	74 g / 2.61 oz						

650-Lumen High-Output Weapon Light



650 LUMENS



- * Produces a high-intensity 650-lumen white light
- * Patent-pending ambidextrous rotary white-light switch for momentary or constant-on
- $\ensuremath{^{\star}}$ Patent-pending mounting system allows quick, one-handed attachment to Picatinny or
- * Powered by 1 x 16340 rechargeable battery (included) or 1 x CR123A battery



500-Lumen Rechargeable Sub-Compact Weapon Light

500 LUMENS



- Provides 500-lumen high-intensity white light or 52 lm low-intensity illumination
- * Patent-pending mounting system quickly attaches to Picatinny and Glock rails
- * Powered by a built-in 250 mAh rechargeable lithium-ion battery with a USB Type-C port
- Battery indicator lights show charge level
- Twin side switches with memory mode function

Light Source	LED	85
Mode	650 lm / momentary on	心 事
Runtime	1 h 30 min / -	
Beam Distance	130 m / 130 m	9
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 16340 (included) / 1 × CR123A battery	
Dimensions	76 mm x 33 mm x 33 mm / 2.99 x 1.30 x 1.30 in	Quic
Weight	76 g / 2.68 oz (without battery)	Picatin





	High	Low
Light Output	500 lm	52 lm
Runtime	1 h 15 min	2 h 30 min
Beam distance	115 m	35 m
Impact resistance	1	m
Water Resistant	IP	K7
Battery	Built-in 250 mAh re	chargeable battery
Dimensions	62 mm x 30 mm x 36 m	m / 2.19 x 1.18 x 1.42 in
Weight	48 g / 1.69 oz	(with battery)

11



Those who put their lives at risk to protect others deserve the very best equipment available. The flashlights in the NEXTORCH Tactical & Police Series were specifically designed to fulfill the demanding needs of law enforcement officers, military personnel, and other armed professionals. Offering unmatched reliability and versatility in low-light and no-light situations, these elite lighting tools are in a class by themselves. When duty calls, the NEXTORCH



TA15 V2.0

700 LUMENS







TA41

2600 LUMENS



T10L

520 LUMENS



. 4 24 5 7 7 A

























1300 LUMENS

3000

LUMENS

TA30C MAX

3,000-Lumen Ultra-Bright One-Step-Strobe Tactical Flashlight







Patented One-step Strobe Switch



Nano-ceramic Window Breaker



High-performance CREE XPH500-HI LED produces a maximum 3,000-lumen output for a beam distance of 390 meters

- Switchable to five modes: Off, three brightness levels, and a strobe
- Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- Rotating magnetic tail cap dial allows easy one-handed mode selection
- Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Powered by 1 x 21700 rechargeable battery (included) with a USB Type-C port

Light Source	LED
Modes	3000 lm / 520 lm / 70 lm / momentary on / strobe
Runtime	2 h 45 min / 5 h / 35 h / - / -
Beam Distance	390 m / 160 m / 60 m / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 21700 rechargeable battery (included)
Dimensions	153 mm x 38 mm x 28 mm / 6.02 x 1.50 x 1.10 in
Weight	153 g / 5.39 oz (without battery)



2100 LUMENS

TA30 MAX

2,100-Lumen Ultra-Bright One-Step Strobe Tactical Flashlight









Patented One-step Strobe Switch



Stainless steel bezel with Nano-ceramic Beads



High-performance LED produces a maximum 2,100-lumen output for a beam distance of 250 meters

* Switchable to five modes: Off, three brightness levels, and a strobe

- * Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- * Rotating magnetic tail cap dial allows easy one-handed mode selection
- Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Powered by 1 x 21700 rechargeable battery with a USB Type-C port

Light Source	LED
Modes	2100 lm / 380 lm / 70 lm / momentary on / strobe
Runtime	2 h 30 min / 6 h / 23 h / - / -
Beam Distance	250 m / 100 m / 45 m / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 21700 rechargeable battery
Dimensions	153 mm x 38 mm x 28 mm / 6.02 x 1.50 x 1.10 in
Weight	148 g / 5.26 oz (without battery)

1600

LUMENS

TA30C

1,600-Lumen High-Output One-Step-Strobe Tactical Flashlight









Patented One-Step-Strobe Switch



Rotating Magnetic Mode-Selection Dial



- High-performance LUMINUS SST-40 LED produces a maximum 1,600-lumen output for a beam distance of 303 meters
- Switchable to five modes: Off, three brightness levels, and a strobe
- Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- Rotating magnetic tail cap dial allows easy one-handed mode selection
- Stainless steel bezel face includes nanoceramic glass-breaker strike points LED battery-level indicator
- Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A batteries

Light Source	LED
Modes	1600 lm / 330 lm / 20 lm / momentary on / Strobe
Runtime	2 h 30 min / 4 h 30min / 50 h / - / -
Beam Distance	303 m / 130 m / 24 m / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery or 2 x CR123A
Dimensions	136 mm x 30 mm x 23 mm / 5.35 x 1.18 x 0.91 in
Weight	97 g / 3.42 oz (without battery)





TA30 V2.0

1,300-Lumen High-Output One-Step -Strobe Tactical Flashlight













USB-Rechargeable 18650 Battery

Compatible with FR-1 Tactical Flashlight Ring (not included)



- High-performance LED produces a maximum 1,300-lumen output for a beam distance of 240 meters
- * Switchable to five modes: Off, three brightness levels, and a strobe
- * Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- * Rotating magnetic tail cap dial allows easy one-handed mode selection * Stainless steel bezel face includes nanoceramic glass-breaker strike points
- * Powered by 1 X 18650 rechargeable battery or 2 X CR123A batteries

Light Source	LED
Modes	1300 lm / 200 lm / 20 lm / momentary on / strobe
Runtime	2 h 30 min / 40 h / - / -
Beam Distance	240 m / 84 m / 16 m / - / -
Water Resistance	IPX8 (2 m)
mpact Resistance	2 m / 6.56 ft
Battery	1 x 18650rechargeable battery or 2 x CR123A
Dimensions	137 mm x 30 mm x 23 mm / 5.39 x 1.18 x 0.91 in
Weight	99 g / 3.49 oz (without battery)

TA20

1,000-Lumen Tri-Mode Tactical Flashlight






Tri-Mode Operation (Off, Tactical, and Duty)



Patented One-Step-Strobe Switch



- Ultra-compact tactical/duty flashlight offers exceptional performance for its size Tri-mode operation instantly switches between off, tactical, and duty settings High-performance OSRAM P9 LED produces a maximum 1,000-lumen output for a beam distance of 210 meters
- Rotating dial built into the flashlight head allows easy one-handed mode selection Switchable to seven modes: Off, two tactical modes (momentary-on and tactical strobe), and four duty modes (three brightness levels and strobe)
- Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure (in tactical mode)
- Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Powered by 1 x 16340 rechargeable battery (included) or 1 x CR123A battery

Light Source	LED
Modes	1000 lm / 190 lm / 25 lm / momentary on / strobe
Runtime	1 h 15 min / 2 h 15 min / 24 h / - / -
Beam Distance	210 m / 85 m / 30 m / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 16340 rechargeable battery or 1 x CR123A
Dimensions	100 mm x 30 mm x 23 mm / 3.94 x 1.18 x 0.91 in
Weight	89 g / 3.14 oz (without battery)



2,600-Lumen Ultra-High-Output Tactical Flashlight Set









Remote Switch & Rechargeable System



- Nano-ceramic strike bezel for rescue and self-defense
- * Quick plug-in remote switch and rechargeable system. * Powered by 1 × 21700 (4800 mAh) high capacity battery
- Optional accessories for more flexible applications: RM85S / RM87/TS41-L/FR-2

T&P SERIES

Light source	White-Light Emitter
Mode	2600 lm / 700 lm / 200 lm / 28 lm / momentary on / Strobe
Runtime	2 h 30 min / 3 h 45 min / 12 h / 71 h / - / -
Beam distance	272 m / 140 m / 75 m / 29m / - / -
Waterproof	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 21700 Battery
Dimensions	148 mm × 38 mm × 27 mm
Weight	143 g / 5.04 oz (without battery)





700-Lumen High-Output Multi-Battery **Tactical Flashlight**







friendly design Rechargeable 14500 Battery



Compatible with CR123A, AA, 14500, and 16340 batteries





Outdoor Industry Silver Award

700

LUMENS

Winner of the Asia Nanoceramic Strike Bezel



- High-performance LED produces a maximum 700-lumen output for a beam distance of 195 meters
- Vari-Source™ design is compatible with AA, CR123A, 14500 rechargeable, and 16340 rechargeable batteries
- Switchable to five modes: Off, three brightness levels, and a strobe
- Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- Rotating magnetic tail cap dial allows easy one-handed mode selection
- Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Compact size and pocket clip for convenient carry

Light Source	LED
Modes	700 lm / 205 lm / 35 lm / momentary on / strobe
Runtime	30 min / 1 h 30 min / 2 h 15 min / - / -
Beam Distance	195 m / 100 m / 35 m / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 14500/ 16340 / CR123A / Aabattery
Dimensions	127 mm x 30 mm x 22 mm / 5.00 x 1.18 x 0.87 ir
Weight	95 g / 3.35 oz (without battery)



2600

LUMENS



1,400-Meter Long-Range Tactical Flashlight





Magnetic Mode-Selection Rechargeable Dial and One-Step-Strobe Switch 21700 Battery



Specifically designed for long-distance, focused-beam applications, like searching and directing fire

- Laser Excited Phosphor (LEP) white-light emitter and precision lenses achieve a maximum 1400-meter beam distance
- Switchable to five modes: Off, three brightness levels, and a strobe Patented one-step-strobe switch provides momentary on with light pressure
- and strobe mode with heavy pressure Rotating magnetic tail cap dial allows easy one-handed mode selection
- Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Powered by 1 x 21700 rechargeable battery (included)

Light Source	WP-NT2 Laser Excited Phosphor (LEP) White-Light Emitter
Modes	520 lm / 155 lm / 65 lm / momentary on / Strobe
Runtime	3 h 30 min / 5 h / 8 h 30 min / - / -
Beam Distance	1400 m / 780 m / 450 m / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	1 x 21700 rechargeable battery (included)
Dimensions	162 mm x 38.4 mm x 27.5 mm / 6.38 x 1.51 x 1.08 in

185 g / 6.52 oz (without battery)



3000 LUMENS



3,000-Lumen Rechargeable Flashlight with Red and Blue Emergency Functions







Red and Blue Signal Functions



Nanoceramic strike bezel



Maximum 3000-lumen output for a beam distance of 260 meters

- * Three LED light sources: white, red, and blue
- Provides four white-light modes: Three brightness levels and strobe
- * Provides five red/blue LED modes: Red beacon, blue beacon, red flashing, blue flashing, and red & blue flashing
- * Stainless steel bezel face includes nanoceramic glass-breaker strike points
- Hidden, waterproof USB Type-C charging port
- Four-LED battery-level indicator

Light Source	White / Red / Blue LEDs
Modes	$600\ lm$ / $36\ lm$ / $3000\ lm$ / $2\ lm$ (red & blue flash) / $2\ lm$ (red flash) / $2\ lm$ (blue flash) / $2\ lm$ (red light) / $2\ lm$ (blue light) / strobe
Runtime	4 h 30 min / 60 h / 2 h / 45 h / 50 h / 60 h / 25 h / 25 h / -
Beam Distance	118 m / 28 m / 260 m / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 21700 rechargeable battery (included)
Dimensions	160 mm x 35 mm x 28.5 mm / 6.30 x 1.38 x 1.12 in
Weight	164 g / 5.78 oz (without battery)



1200 LUMENS

Side activation and mode-selection switches

1,200-Lumen Ultra-Long-Range Rechargeable Flashlight

P82



LED battery-level indicator



High Optical Density (HOD) LED creates a maximum 1200-lumen output for a beam distance of 1100 meters

- * Ideal for long-range illumination applications
- * Provides four white-light modes: Three brightness levels and strobe
- * Side One-Step-Strobe activation and mode-selection switches
- * Stainless steel bezel face includes nanoceramic glass-breaker strike points
- * Powered by 1 x 21700 rechargeable battery with USB Type-C charging port
- * Four-LED battery-level indicator

High Optical Density (HOD) LED
425 lm / 33 lm / 1200 lm / momentary on / strobe
4 h 30 min / 85 h / 3 h 30 min / - / -
645 m / 181 m / 1100 m / - / -
IPX7 (1 m)
1 m / 3.28 ft
1 x 21700 rechargeable battery
188.3 mm x 60 mm x 28.5 mm / 7.41 x 2.36 x 1.12 in
276 g / 9.74 oz (without battery)



1300 LUMENS

P83

1,300-Lumen Rechargeable Flashlight with Red and Blue Emergency Functions











Red and Blue Warning Functions





- Maximum 1300-lumen output for a beam distance of 140 meters
- Three LED light sources: white, red, and blue
- Provides four white-light modes: Three brightness levels and strobe * Provides five red/blue LED modes: Red beacon, blue beacon, red flashing,
- blue flashing, and red&blue flashing
- * Stainless steel bezel face includes nanoceramic glass-breaker strike points Hidden, waterproof USB Type-C charging port
- our-LED battery-level indicator

Light Source	White / Red / Blue LEDs
Modes	1300 lm / 350 lm / 25 lm / strobe / 2 lm Red&Blue Flash / 2 lm Red Flash / 2 lm Blue Flash / 2 lm Red Beacon / 2 lm Blue Beacon
Runtime	2 h / 6 h / 4 h 30 min / 2 h / - / 35 h / 50 h / 60 h / 25 h / 25 h
Beam Distance	280 m / 140 m / 35 m / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery
Dimensions	155 mm x 35 mm x 28.5 mm / 6.10 x 1.38 x 1.12 in
Weight	177 g / 6.24 oz (without battery)



2600 LUMENS

P81

2,600-Lumen One-Step-Strobe Rechargeable Flashlight










USB Type-C Direct Charging





- * Provides four white-light modes: Three brightness levels and strobe
- * Side One-Step-Strobe activation and mode-selection switches * Stainless steel bezel face includes nanoceramic glass-breaker strike points
- * Powered by 1 x 21700 rechargeable battery with USB Type-C direct charging port
- * Four-LED battery-level indicator

Light Source	LED
Modes	570 lm / 40 lm / 2600 lm / momentary on/ strobe
Runtime	4 h 30 min / 38 h / 2 h / - / -
Beam Distance	140 m / 35 m / 310 m / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 21700 rechargeable battery
Dimensions	161 mm x 35 mm x 28.5 mm / 6.34 x 1.38 x 1.12 in
Weight	174 g / 6.13 oz (without Battery)



1300

LUMENS

P80

1,300-Lumen One-Step-Strobe Rechargeable Flashlight





USB Type-C Direct Charging





* High-performance LED creates a maximum 1300-lumen output for a beam distance of 280 meters

Provides four white-light modes: Three brightness levels and strobe

* Side One-Step-Strobe activation and mode-selection switches

* Stainless steel bezel face includes nanoceramic glass-breaker strike points

Powered by 1 x 18650 rechargeable battery with USB Type-C direct charging port

Four-LED battery-level indicator

Light Source	LED
Modes	350 lm / 25 lm / 1300 lm / momentary on /strobe
Runtime	4 h 30 min / 60 h / 2 h / - / -
Beam Distance	140 m / 35 m / 280 m / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery
Dimensions	150 mm x 35 mm x 28.5 mm / 5.91 x 1.38 x 1.12 in
Weight	177 g / 6.24 oz (without battery)



1400

LUMENS

P10 1,400-Lumen Multi-Color Right-Angle Flashlight





Two independent switches



Three LED light sources



Maximum 1400-lumen white-light output for a beam distance of 200 meters

* Compact, right-angle design and pocket clip for hands-free, on-body wear Three LED light sources: white, red, and blue

* Two independent switches control white-light and red/blue LED functions

* Provides four white-light modes: Three brightness levels and strobe * Provides three red/blue LED modes: Red & Blue Flash, Red Beacon, and Blue

Light Source	White / Red / Blue LEDs
Modes	200 lm / 25 lm / 1400 lm / momentary on / strobe / Red & Blue Flash / Red Beacon / Blue Beacon
Runtime	6 h / 55 h / 3 h 30 min / - / - / 80 h / - / -
Beam Distance	70 m / 26 m / 200 m / - / - / - / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery
Dimensions	117.2 mm x 24 mm x 32.1 mm / 4.61 x 0.94 x 1.26 in
Weight	91 g / 3.21 oz (without battery)



1300

LUMENS

P8

1,300-Lumen High-Output Rechargeable Flashlight









Compact Design



Includes Removeable Lanyard



- High-performance LED creates a maximum 1300-lumen output for a beam distance of 240 meters
- * Provides four white-light modes: Three brightness levels and strobe
- * Side One-Step-Strobe activation and mode-selection switches
- * Stainless steel bezel face includes nanoceramic glass-breaker strike points Powered by 1 x 18650 rechargeable battery with USB Type-C direct charging port
- Four-LED battery-level indicator

Light Source	LED
Modes	350 lm / 25 lm / 1300 lm / momentary on / strobe
Runtime	4 h 30 min / 60 h / 2 h / - / -
Beam Distance	115 m / 30 m / 240 m / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery
Dimensions	140 mm x 28 mm x 24 mm / 5.51 x 1.10 x 0.94 in
Weight	140 g / 4.93 oz (with battery)





660 LUMENS

PA₅ 660-Lumen Adjustable-Beam Rechargeable Flashlight 5.0.S.



Patented Beam-Focusing Technology



Patented Direct-Charging Technology

High-performance LED creates a maximum 660-lumen white-light output Patented Fresnel Lens Focusing Technology adjusts beam from flood to spot by rotating the head

* Provides two white-light modes, a strobe, and S.O.S.

*Multi-function DUO Switch allows easy activation and mode selection * Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A batteries

Direct charging with hidden Micro USB port

RedDot Award Winner

Light Source	LED
Modes	660 lm / 30 lm / momentary on / strobe / S.O.S.
Runtime	4 h / 32 h / - / - / -
Beam Distance	220 m
Waterproof	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	1 x 18650 rechargeable battery (included) or 2 X CR123A
Dimensions	146 mm x 34 mm x 26 mm/ 5.75 x 1.34 x 1.02 in
Weight	147 g / 5.19 oz (without battery)



300 LUMENS

P56

6-LED Forensic Flashlight Kit







impact Resistance	1 m / 3.28 ft
Water Resistance	IPX8 (2m)
Battery	1 × 18650 or 2 × CR123A batteries
Weight	190 g / 6.7 oz (without battery)
Dimensions	166 mm x 36.6 mm x 27.3 mm / 6.54 x 1.44 x 1.07 ir
Material	Aluminum Alloy



* Provides six light wavelengths: white, blue, red, green, infrared (IR), and ultraviolet (UV)

- * Provides uniform illumination for forensic photography
- * Side-mounted rotary switch for easy one-handed mode selection
- * Powered by 1 x 18650 rechargeable battery with USB Type-C direct charging port
- * Includes transport case, chargers, and red, amber, and yellow forensic safety glasses


Model	WHITE —		UV 365 nm		BLUE 450 nm	
Wavelength						
Modes	300 lm	11 lm	76 mW	7 mW	18 lm	3 lm
Beam Distance	110 m	21 m	-		16 m	6 m
Runtime	3 h 45 min	36 h	5 h	40 h	7 h 30 min	35 h

Model	GREEN 525 nm		del GREEN		RE	D	IR	
Wavelength			630 nm		850 nm			
Modes	40 lm	8 lm	35 lm	8 lm	150 mW	32 mW		
Beam Distance	41 m	17 m	40 m	17 m		_		
Runtime	8 h 30 min	39 h	4 h 30 min	22 h	7 h 45 min	19 h		









- * Multiple mounting options
 * Powered by 2 x 21700 rechargeable batteries with USB Type-C direct charging ports

T&P SERIES

LED battery-level indicator



Individually Focusable Beams



Counter-terrorism

8000 LUMENS

LED	White Light LED
Mode	4000 lm / strobe
Runtime	2 h 45 min / 3 h 45 min
Beam distance	550 m / -
Waterproof	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	2 x 21700
Dimensions	185 mm x 85 mm x 55.6 mm
Weight	433 g (without Battery)



800 LUMENS

P5G / P5R / P5B

800-Lumen One-Step-Strobe Dual-Light Rechargeable Flashlight















Dual-Light Color Selection



* High-performance LED creates a maximum 800-lumen white-light output

* Proprietary Dual-Light technology allows instantaneous shift from white to

colored light by rotating the bezel

* Provides two white-light modes, a strobe, S.O.S., and a choice of green, red, or blue secondary light sources (separate models)

* Multi-function DUO Switch allows easy activation and mode selection

* Powered by 1 x 18650 rechargeable battery (included) with Micro USB direct charging port

* RedDot Award Winner

	P5G / P5R / P5B
Light Source	White LED / Green / Red /Blue LEDs
Modes	800 lm / 45 lm / 200 lm (green) / 131 lm (red) / 80 lm (blue) / strobe / S.O.S.
Runtime	3 h 45 min / 27 h / 5 h (green) / 5 h 45 min (red) / 5 h 15 min (blue) / — / —
Beam Distance	246 m (white)
Waterproof	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	1 x 18650 rechargeable battery (included) or 2 X CR123A
Dimensions	168 mm x 40 mm x 26 mm / 6.61 x 1.57 x 1.02 in
Weight	185 g / 6.53 oz (without battery)



8,000-Lumen Rechargeable Visual/ **Auditory Distraction Device**



Anti-Roll Tabs





Hand-thrown8000-lumen visual strobe and 100dB auditory distraction device for use by tactical teams

* Cylindrical LED array ensures omni-directional light projection * Selectable strobe-activation delays: 1, 1.5, and 3 seconds

* Selectable strobe durations: 3, 6, and 12 seconds

* Powered by built-in rechargeable battery with USB Type-C direct charging port

Anti-roll tabs

Battery-level indicator

Light Source	Multiple LEDs
Light Output	8000 lm
Sound Level	100 dB ± 10dB (at 1 m)
Usage Count Per Charge	3 sec - 240 uses / 6 sec - 120 uses / 12 sec - 60 uses
Waterproof	IPX4
Impact Resistance	2 m / 6.56 ft
Dimensions	146 mm x 72 mm x 72 mm / 5.75 x 1.02 x 1.34 in
Weight	386 g / 13.62 oz (with battery)







T53 SET

760-Lumen Multi-Color Hunting Flashlight









INCLUDED ACCESSORIES

RM85S Scope Mount TS41-L Remote Switch 1 x 18650 Rechargeable Battery UC4 USB Charging Cable







Proprietary Single-Reflector Design

Side dial switch allows mode selection

USB direct charging design

- Proprietary multi-light technology allows one reflector to focus the white, red, and green LEDs
 Provides two brightness levels, a strobe, and an S.O.S.function with all three light colors
 Multi-function DUO Switch allows easy activation
 Rotating side dial for easy one-handed mode selection
 Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A batteries

- batteries

 * Direct charging with hidden Micro USB port

 * Includes remote switch and scope mount for attachment to a long gun

	White	Green	Red
Light Source	LED	Green LED	Red LED
Modes	strobe / 760 lm / 45 lm / momentary on / S.O.S.	strobe / 129 lm / 30 lm / momentary on / S.O.S.	strobe / 109 lm / 23 lm / momentary on / S.O.S.
Runtime	- / 4 h 30 min / 31 h / - / -	-/7h/34h/-/-	- / 4 h 45 min / 25 h / - / -
Beam Distance	220 m / 722'	160 m / 525'	122 m / 400'
Waterproof		IPX7 (1 m)	
Impact Resistance		1 m / 3.28 ft	
Battery	1 x 18	8650 rechargeable battery (included) or 2 X CF	R123A
Dimensions		147 mm x 37 mm x 25.4 mm / 5.79 x 1.46 x 1.00 in	Y .
Weight		155 g / 6.46 oz (without battery)	





T5 SET

760-Lumen 400-Meter Long-Range Hunting Flashlight Set



INCLUDED ACCESSORIES

RM85S Scope Mount TS31-L Remote Switch 2 X CR123A Batteries

- * High-performance LED produces a maximum 760-lumen output for a beam distance of 400 meters
- * Offers long-range illumination capability in a compact, easily carried size * Provides three brightness levels, a strobe, and an S.O.S. function
- * Patented multi-function DUO Switch allows easy activation and
- mode selection
- * Powered by 2 x CR123A batteries (included) or 1 x 18650 rechargeable
- * Includes remote switch and scope mount for attachment to a long gun

Light Source	LED
Modes	760 lm / 220 lm / 45 lm / momentary on / strobe / S.0.S.
Runtime	3 h / 6 h / 27 h / - / - / -
Beam Distance	400 m / 205 m / 95 m / - / - / -
Waterproof	IPX8 (2m)
Impact Resistance	2 m / 6.56 ft
Battery	2 X CR123A (included) or 1 x 18650 rechargeable battery
Dimensions	143 mm x 34 mm x 25.4 mm / 5.63 x 1.34 x 1.00 in
Weight	119 g / 4.2 oz (without battery)

T7 MAX SET

1,200-Lumen Long-Range Rechargeable Hunting Flashlight Set






RM85S Scope Mount

TS41-L Remote Switch

INCLUDED ACCESSORIES

1 x 18650 Rechargeable Battery

UC4 USB Charging Cable



* Ideal for long-range illumination applications

- * Provides four brightness levels, a strobe, and an S.O.S. function
- * Multi-function DUO Switch allows easy activation
- * Rotating side dial for easy one-handed mode selection Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A batteries
- * Direct charging with hidden Micro USB port

Light Source	LED / Green LED / Red LED
Modes	1200 lm / 621 lm / 150 lm / 21 lm / momentary on / strobe / S.O.S.
Runtime	3 h / 4 h 30 min / 14 h / 80 h / - / - / -
Beam Distance	1100 m / 755 m / 350 m / 142 m / - / - / -
Waterproof	IPX8
Impact Resistance	1 m / 3.28 ft
Battery	1 × 21700 (4800 mAh) Lithium battery
Dimensions	172.4 mm (length) × 27.5 mm (body dia.) × 60.8 mm (head dia.)
Weight	225 g / 7.94 oz (without battery)



T7 SET V2.0

1,300-Lumen 420-Meter Long-Range Hunting Flashlight Set



INCLUDED ACCESSORIES

RM85S Scope Mount

TS41-L Remote Switch

1 x 18650 Rechargeable Battery

UC4 USB Charging Cable

- *High-performance LED produces a maximum 1300-lumen output for a beam distance of 420 meters
- * Offers long-range illumination capability in a compact, easily carried size

 * Provides four brightness levels, a strobe, and an S.O.S. function

 * Patented multi-function DUO Switch allows easy activation and mode
- selection
- * Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A
- * Includes remote switch and scope mount for attachment to a long gun
- * Single USB port allows direct charging and attachment of the remote switch

Light Source	LED	
Modes	1300 lm / 520 lm / 140 lm / 40 lm / momentary on / strobe / S.O.S.	
Runtime	2 h 30 min / 3 h 45 min / 10 h / 27 h / - / - / -	
Beam Distance	420 m / 260 m / 135 m / 70 m / - / - / -	
Waterproof	IPX8 (2 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 x 18650 rechargeable battery (included) or 2 x CR123A	
Dimensions	154 mm x 43.8 mm x 25.4 mm / 6.06 x 1.72 x 1.00 in	
Weight	142 g / 5 oz (without battery)	

1200 LUMENS

27





TA41 SET

2,600-Lumen Ultra-High-Output Tactical Flashlight Set



INCLUDED ACCESSORIES

RM85S Scope Mount TS41-L Remote Switch

1 x 21700 Rechargeable Battery

UC4 USB Charging Cable

- High-performance CREE XP50.2 LED produces a maximum 2600-lumen output
- * Offers ultra-bright, long-range illumination capability in a compact, easily carried size
- * Provides four brightness levels, a strobe, and an S.O.S. function
- * Patented multi-function tail cap switch allows easy activation and mode selection
- * Stainless steel bezel face includes nanoceramic glass-breaker strike points
- * Powered by 1 x 21700 rechargeable battery (included)
- * Includes remote switch and scope mount for attachment to a long gun
- * Single USB port allows direct charging and attachment of the remote switch

Light Source	LED
Modes	$2600\ lm$ / $700\ lm$ / $200\ lm$ / $28\ lm$ / momentary on / strobe / S.O.S.
Runtime	2 h 30 min / 3 h 45 min / 12 h / 71 h / - / - / -
Beam Distance	272 m / 140 m / 75 m / 29 m / - / - / -
Waterproof	IPX8 (2m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 21700 rechargeable battery (included)
Dimensions	148 mm x 38 mm x 27 mm / 5.83 x 1.50 x 1.06 in
Weight	143 g / 5.04 oz (without battery)

T5G SET V2.0

1,200-Lumen Rechargeable Dual-Light Hunting Flashlight Set









INCLUDED ACCESSORIES

RM85S Scope Mount

TS41-L Remote Switch

1 x 18650 Rechargeable Battery

* T5G is not compatible with the RM87 universal mount due to the magnet effect on the switch

- * Dual white and green LED light sources produce maximum 1200-lumen and 170-lumen outputs
- * Patented dual-light design switches from white to green light by rotating the head
- * Both LED colors provide two brightness levels, a strobe, and an S.O.S. function
- * Multi-function DUO Switch allows easy activation and mode selection * Powered by 1 x 18650 rechargeable battery (included) or 2 x CR123A
- Includes remote switch and scope mount for attachment to a long gun
- Single USB port allows direct charging and attachment of the remote switch

Light Source	LED	Green LED
Modes	1200 lm / 35 lm / momentary on / strobe / S.O.S.	170 lm / 27 lm / momentary on / strobe / S.O.S. (80 lm)
Runtime	3 h 15 min / 35 h / - / - / -	5 h 30 min / 37 h / - / - / -
Beam Distance	265 m / 46 m / - / - / -	230 m / 63 m / - / - / -
Waterproof	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 x 18650 rechargeable batte	ry (included) or 2 X CR123A
Dimensions	145 mm x 40 mm x 25.4 mm	/ 5.71 x 1.57 x 1.00 in
Weight	165 g / 5.82 oz (without batte	erv)









TA40 HUNTING SET

1,040-Lumen Flashlight Set with Magnetic Mount





INCLUDED ACCESSORIES

RM87 Magnetic Mount

TS41-L Remote Switch

1 x 18650 Rechargeable Battery

UC4 USB Charging Cable

- * High-performance CREE XM-L2 LED produces a maximum 1040-lumen
- * Provides four brightness levels, a strobe, and an S.O.S. function
- * Patented multi-function DUO switch allows easy activation and mode selection
- * Powered by 2 x CR123A batteries (included) or 1 x 18650 rechargeable battery * Includes remote switch and magnetic mount for tool-free attachment to
- * Single USB port allows direct charging and attachment of the remote switch

Light Source	LED
Modes	1040 lm / 530 lm / 250 lm / 80 lm / strobe / S.O.S.
Runtime	1 h 30 min / 2 h 15 min / 3 h 30 min / 10 h / - / -
Beam Distance	285 m / 935.04'
Waterproof	IPX8 (2 m)
Impact Resistance	3 m / 9.84 ft
Battery	2 x CR123A (included) or 1 x 18650 rechargeable battery
Dimensions	147 mm x 34 mm x 25.4 mm / 5.79 x 1.34 x 1.00 in
Weight	124 g / 4.37 oz (without batteries)

E SERIES

Compact, convenient, and easy to operate, NEXTORCH's E Series lights offer incredible illumination in a pocket-friendly format. The ultimate everyday-carry lighting tools, they are ideal for both personal and professional use.





High Output Rechargeable EDC Pocket Flashlight







Metal Tail Switch



IPX8 Submersible 2m Impact Resistance



Max output up to 3000 lumens

- * Single switch with 4 modes for simple operation
- * Easy one-step-strobe tail switch
- * Nano-ceramic strike bezel for rescue and self-defense
- * Hidden Type-C design, economical and convenient
- Optional accessories for more flexible applications: FR-2/V51/V61

LED	LED
Mode	3000 lm / 550 lm / 30 lm / strobe
Runtime	2 h 30 min / 4 h 15min / 65 h / -
Beam distance	210 m / 100 m / 25 m /-
Submersible	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 21700
Dimensions	153 mm × 30 mm × 27 mm
Weight	130 g / 4.58 oz (without battery)





E51C

1,600-Lumen High-Performance Rechargeable EDC Flashlight









Pocket-sized Design





- High-performance OSRAM P9 LED produces a maximum 1,600-lumen output for a beam distance of 205 meters
- Switchable to four modes: Three brightness levels, and a strobe
- * Patented one-step-strobe switch provides momentary on with light pressure and strobe mode with heavy pressure
- Includes nanoceramic glass-breaker strike points
- * LED battery-level indicator
- Hidden USB Type-C charging port
- Powered by 1 x 18650 rechargeable battery (included)

Light Source	LED
Modes	1600 lm / 340 lm / 28 lm / strobe
Runtime	2 h 30 min / 4 h 15 min / 43 h / -
Beam Distance	205 m / 102 m / 25 m / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery (included)
Dimensions	139 mm x 27 mm x 23 mm / 5.47 x 1.06 x 0.91 in
Weight	94 g / 3.31 oz (without battery)



C2UV

Compact Ultraviolet Flashlight

* Dedicated UV flashlight for specialized applications, like authenticating currency and ID cards, finding pet stains and body fluids, and examining certain minerals

- * 405nm UV LED light source is invisible to the naked eye, but causes specific materials to fluoresce
- * Durable aluminum construction is IPX7 rated to be waterproof to a depth of one meter
- * Compact, lightweight, and easily carried
- * Powered by 2 x AA batteries
- * Lanyard included



Light Source	UV LED
Wavelength	405 nm
Power Output	500 mW
Impact Resistance	1 m / 3.28 ft
Waterproof	IPX7 (1 m)
Battery	2 x AA batteries (included)
Dimensions	151 mm x 26 mm x 19 mm / 5.94 x 1.02 x 0.75 in
Weight	72 g / 2.53 oz (without batteries)

C1/C2 Compact Flashlight

- * Machined from aerospace-quality aluminum with a durable Type III hard-anodized finish
- * Tail cap switch allows easy activation and mode
- * Compact, lightweight, and easily carried
- * Powered by 1 x AA battery (included)/Powered by 2 x AA battery (included)
- * Lanyard included





	C1	C2
ght Source	LED	LED
odes	140 lm / 20 lm	250 lm / 70 lm
untime	1 h / 13 h	1 h / 40 h
eam Distance	86 m / 30 m	120 m / 60 m
aterproof	IPX7 (1 m)	IPX7 (1 m)
npact Resistance	1 m / 3.28 ft	1 m / 3.28 ft
attery	1 x AA battery (included)	2 x AA battery (included)
mensions	102 mm x 19.2 mm x 26.4 mm	152 mm × 19.2mm × 26.4mm
eight	50 g / 1.76 oz (without battery)	70 g / 2.47 oz (without battery)

S SERIES

Incredibly lightweight and convenient, the lights in the NEXTORCH S Series are the perfect EDC (everyday carry) lighting tools. They are as easy to carry as a pen or a pencil yet produce light output comparable to flashlights many times their size.







300-Lumen Multi-Function Rechargeable Keychain Light













- * Ultra-compact multi-function light small enough for keychain carry
 * Includes four LED light sources: White, red, blue, and ultraviolet (UV)
- * Maximum 300-lumen output for a beam distance of 78 meters
- Maximum 300-lumen output for a beam distance of 78 meters
- $\mbox{*}$ Features three white-light brightness levels, strobe, and red, blue, and UV light beacon and flashing modes
- * Independent mode switches
- * Built-in 180 mAh rechargeable battery with USB Type-C direct charging port



K3 SERIES

K3RT Rechargeable Pocket-sized / Safety Penlight

- Memory Mode: 2 seconds after turning off, turn on again to enter the previous-used mode
- Charging via the hidden Type-C direct charging port
- · Pen-like compact size, convenient for everyday carry
- · Equipped with a stainless-steel clip for easily hanging on pockets,backpacks, toolkit, etc.
- · Chrome-plated anti-skid press switch
- The strike bezel of K3RT is embedded with high-hardness ceramic beads for quick window breaking and close defense

K3 v2.0 EDC Penlight

- · High-performance LED produces a maximum 250-lumen output
- Provides three brightness levels and a strobe
- · Programmable memory mode
- · Compact pen-sized design with a sturdy pocket clip
- · Powered by 2 x AAA batteries (included)





250 LUMENS



Model	K3RT
Light Source	LED
Modes	330 lm / 65 lm / 9 lm / strobe
Runtime	45 min / 2 h / 11 h / -
Beam Distance	70 m / 30 m / 12 m / -
Waterproof	IPX7(1 m)
Impact Resistance	1 m / 3.28 ft
Battery	Built-in 320 mAh li-ion battery
Dimensions	125 mm x 12.9 mm x 14.3 mm
Weight	37 g / 1.31 oz (without batteries)



Model	K3 v2.0
Light Source	LED
Modes	250 lm / 80 lm / 10 lm / strobe
Runtime	1 h / 2 h 45 min / 20 h / —
Beam Distance	60 m / 35 m / 12 m / -
Waterproof	IPX7(1 m)
Impact Resistance	1 m / 3.28 ft
Battery	2 x AAA batteries (included)
Dimensions	150 mm x 14 mm x 12 mm
Weight	27.6 g / 0.97 oz (without batteries)

Dr.K3UV

Wood's Lamp UV Penlight

- * High-performance Wood's Lamp UV flashlight for use in medical examinations
- * Focused 365nm UV light allows easy detection of skin and hair irregularities, corneal lesions, and other issues
- * Can also be used for other UV applications, like forensic examination and authenticating currency and ID cards
- * Compact, lightweight, and easily carried
- * Powered by 2 x AAA batteries



Dr.K3L/Dr.K3S

Medical Penlights

- * Dual color temperature medical flashlights for use in medical examinations
- * Provides both 5500K white light for examination and 3000K yellow light for pupil reaction tests
- * High color rendering index for accurate color assessment
- * Blue Light Hazard rating of RG0 (Risk Group 0-No risk)
- * Compact, lightweight, and easily carried
- * Pupil reference scale included on flashlight body
















Uniform Beam Pattern

Model	Dr.K3 UV
Light Source	365 nm UV LED
Power Output	600 mW
Run Time	1 h 15 min
Impact Resistance	1 m / 3.28 ft
Battery	2 × AAA batteries
Weight	28 g (without batteries)
Dimensions	148 x 14.3 x 13.3 mm

Model	Dr.K3L		Dr.K3S	
Light Source	Dual LEDs (Yellow a	and White)		LED (Yellow / Neutral White)
Color Rendering Index(RA)	≥ 95		≥ 95	
Blue-Light Hazard Rating	RG0(Yellow)		RG0	
Color Temperature	3000K(Yellow)	5500K(\	White)	3000 K (Yellow)
Modes	2 lm	10 lm	75 lm	5000 K(Neutral White)
Runtime	42 h	15 h	1 h 30 min	55 h
Beam Distance	7 m	15 m	40 m	
Waterproof				
Impact Resistance	1 m / 3.28 ft			a - s
Battery	2 x AAA batterie	s (include	d)	1 × AAA (included)
Dimensions	149.8 mm x 14.3	mm x 13.3	mm	105 mm × 14.3 mm
Weight	27.8 g / 0.98 oz (without bat	tery)	18.7 g / 0.66 oz (without battery

The most effective way to get a job done in low-light conditions is to use both hands. NEXTORCH's innovative U Series offers a broad range of hands-free lighting tools that are ideally suited for law enforcement, security, first responder, and civilian applications.



















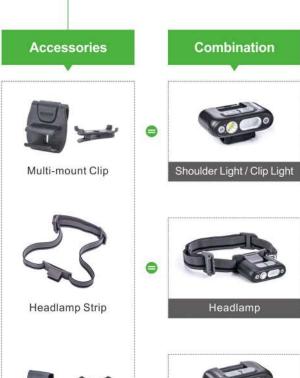

Helmet Mount

Bicycle Mount

Helmet Light

Bicycle Light



U SERIES

UT41 ... Multi-Function Rechargeable Safety Light













High-visibility multi-function safety light provides excellent visibility

* Includes six LED light sources: Green, yellow, blue, red, white, and infrared (IR)

* Features 13 beacon and flashing operational modes

White / Red / Blue LEDs

500 mAh Li-ion battery

29 g / 1.05 oz

* Built-in rechargeable battery with USB Type-C direct charging port

Green 13 lm / White 20 lm / IR 26 mW 56 h / 18 h / 16 h / 20 h / 18 h / 12 h / 14 h

* LED battery-level indicator

Light Source

Water Resistance IPX8 (2 m) Impact Resistance 2 m / 6.56 ft

Modes

Runtime

Battery

Dimensions Weight

* Includes hardware to mount on helmets, MOLLE webbing, and other

Red-Blue Flash - / Red 3 lm / Blue 3 lm / Yellow 10 lm /

62.5 mm x 27 mm x 25 mm / 2.46 x 1.06 x 0.98 in







LED Infrared Induction Type-C Rechargeable

Combination hands-free white-light illumination and high-visibility colored

Three LED light sources: white, red, and blue

* Colored light modes include constant-on red beacon, flashing red, and flashing red & blue

* Hands-free gesture-sensor control

* Built-in rechargeable battery with USB Type-C direct charging port

* Multi-purpose clip mount attaches to caps, pockets, backpacks, and MOLLE webbing

* Also compatible with optional mounting platforms for use as a headlamp, bike light, or helmet light

Light Source	Three LED:	s (white, red, a	and blue)		
	High (White)	Low (White)	Red	Red Flash	Red-Blue Flash
Modes	220 lm	28 lm	4 lm	4 lm	=
Runtime	6 h	16 h	21 h	42 h	80 h
Beam Distance	53 m	19 m	141	=:	=
Water Resistance	IPX4				
Impact Resistance	1 m / 3.28	ft			
Battery	Built-in 640 m	Ah rechargeable	battery with	USB Type-C dire	ct charging port
Dimensions	61 mm x 5	3 mm x 30 m	m / 2.40	x 2.09 x 1.18	in
Weight	50 g / 1.76	oz (with batt	ery)		

Helmet Mount



MOLLE Mount

UL360

Utility Pocket Lantern

Magnetic .

Bottom Plate






Rotary Tail Switch







* Includes a magnetic base, elastic cord, and S-biner for a variety of mounting options

* Fully adjustable lamp body rotates 360 degrees and pivots vertically

* Powered by 1 x AA battery (included)



Elastic Strap for Tying Anywhere

Attach to Ironwork by Magnetic Plate

Light Source	Neutral White LED
Modes	70 lm / 10 lm
Runtime	3 h 15 min / 30 h
Beam Distance	5 m / 16.4'
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	1 × AA (included)
Dimensions	78 mm x 34 mm x 21 mm / 3.07 x 1.34 x 0.83 in
Weight	40 g / 1.41 oz (without battery)







Multi-Mount Clip

Hands-Free Gesture Control





320

LUMENS

Light Source Dual White and Red LEDs Modes 220 lm / 140 lm / 320 lm / 4 lm Runtime 7 h / 7 h 30 min / 3 h 45 min / 21 h / -Beam Distance 53 m / 15 m / 55 m / -Water Resistance 1 m / 3.28 ft Impact Resistance Battery Built-in 640 mAh rechargeable battery Dimensions 61 mm x 47 mm x 19 mm / 2.40 x 1.85 x 0.75 in Weight 41 g / 1.44 oz (without accessories)

Provides four white-light brightness levels and three beam patterns

* Red-light modes include constant-on beacon and flashing safety mode

Built-in rechargeable battery with USB Type-C direct charging port

* Compatible with multiple mounting platforms for use as a headlamp,

Dual white and red LED light sources

* Hands-free gesture-sensor control

bike light, or helmet light



Dual White and Red LED Light Sources















Helmet Clamp Helmet Mount Webbing Clip Velcro 4 Accessories





Security Warning Light



* High-visibility colored safety light provides 360-degree visibility from a distance of 1,000 meters and white-light illumination

- * Features 22 blue-red LEDs and a white illumination LED
- * Orientation sensor automatically switches between horizontal and vertical LED arrays for maximum visibility
- * Hands-free gesture-sensor control
- * Built-in rechargeable battery with USB Type-C direct charging port
- * Two built-in high-strength magnets allow easy attachment to steel surfaces
- * Includes platforms to mount on helmets, MOLLE webbing, and other surfaces

Light Source	White LED and 22 blue-	red LEDs	
Modes	Red-blue Flash (horizontal)	Red-blue Flash (vertical)	White Light
	-	-	11 lm
Runtime	20 h	22 h	25 h
Water Resistance	IPX4		
Impact Resistance	2 m / 6.56 ft		
Battery	Built-in 640 mAh rechargeable	e battery with USB Type-C dire	ect charging por
Dimensions	72.3 mm x 50 mm x 40	mm / 2.85 x 1.97 x 1.	57 in
Weight	92.3 g / 3.25 oz (with b	attery)	











* Combination white light illumination and red & blue flashing signal light * COB (Chip-on-Board) light source provides soft flood lighting * Head tilts 180 degrees vertically for accurate light placement

* Powered by a built-in rechargeable battery with a USB Type-C charging port

* LED battery-level indicator



Red and Blue Flashing Signal



Light Source	COB		
Modes	Red-Blue Flash: -	High (White): 170 lm	Low (White): 20 lm
Runtime	81 h	2 h	11 h
Water Resistance	IPX4		
Impact Resistance	1 m		
Battery	Built-in rechargeable	e battery with USB Type-	C direct charging port
Dimensions	60 mm x 46 mm >	18 mm / 2.36 x 1.81	x 0.71 in
Weight	48 g / 1.69 oz (w	ith battery)	

UT21 Type-C Rechargeable Warning Light







Detachable Clip

Strong Magnetic Adsorption



- * Standard shoulder clip with 360 ° rotation
- * 2 m impact-resistant, IPX4 water resistant * Long-lasting 640 mAh built-in li-ion battery with Type-C charging port
- * Gravity sensor design allows to easily activate it even with gloves on via double-tap action
- * 22 blue-red LEDs for all-rounded lighting; white light illumination with over 1,000 beam distances for night-lighting needs

LED	White / Red / Blue LED:	S	
Mode	Red-blue Flash (horizontal)	Red-blue Flash (vertical)	White Light
		_	11 lm
Runtime	20 h	22 h	25 h
Water Resistant	IPX4		
Impact resistance	2 m / 6.56'		
Battery	Built-in 640 mAh li-ion l	pattery	
Dimensions	72.4 mm × 50 mm × 38	3.4 mm	
Weight	85 g (with battery)		













Headlamp Strap

Bike Mount



USB Type-C Rechargeable Design

Helmet Mount

Hat Light



- Compact, lightweight design
- * Dual white and red LED light sources
- * Provides two white-light brightness levels
- * Red-light modes include constant-on beacon and flashing safety mode
- * Built-in rechargeable battery with USB Type-C direct charging port
- Compatible with multiple mounting platforms for use as a clip-on light, headlamp, bike light, or helmet light

Light Source	Dual White and Red LEDs		
Modes	White: 170 lm / 20 lm	Red: 5 lm / flash	
Runtime	2 h / 11 h	18 h/-	
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	Built-in 640 mAh rechargea	ble battery	
Dimensions	60 mm x 46 mm x 18 mm / 2.36 x 1.81 x 0.71 in		
Weight	39 g / 1.37 oz (without accessories)		

UL12

Multi-Function Clip Light/Safety Light











* High-visibility colored safety light and white-light illumination * Clip-on design allows easy attachment to caps, pockets, backpacks, and MOLLE webbing

* Pivoting design adjusts through 180-degree range * Powered by 2 x AAA batteries (included)



19 LUMENS

Light Source	White, Red, and Blue LEDs
Modes	17 lm (white) / 3 lm (red) / red-blue flash
Runtime	7 h 30 min / 18 h / 62 h
Beam Distance	13 m / 6 m / -
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	2 x AAA batteries (included)
Dimensions	32 mm x 48 mm x 54 mm / 1.26 x 1.89 x 2.13 in
Weight	49 g / 1.73 oz (with batteries)



Lightweight Multi-function Flashing Clip Light







Use the Clip to



Security Warning

- * White light illumination + red&blue flash * Detachable clip for mounting on MOLLE, shoulder strap, backpack,
- * Compact size with only 49.5g(with battery)
 * 180 rotatable design to realize multi-angle lighting

LED	White / Blue LEDs	
Mode	19 lm / —	
Runtime	7 h 30 min / 62 h	
Beam distance	11 m	
Water Resistant	IPX4	
Impact resistance	1 m / 3.28'	
Battery	2 x AAA batteries (included)	
Dimensions	32 mm x 48 mm x 54 mm	
Weight	49 g / 1.73 oz (with batteries)	






500 LUMENS

oStar

High-Performance Modular Helmet Light





- * Compatible with multiple helmet styles
 * Switchable to four modes: Three brightness levels and S.O.S.
- * High-performance LED produces a maximum 500-lumen output for a 131-meter beam distance
- * Powered by 1 x 18650 rechargeable battery (included)











Light Source	LED
Modes	500 lm / 185 lm / 25 lm / S.O.S.
Runtime	6 h 30 min / 14 h / 60 h / -
Beam Distance	131m / 75m / 27m
Water Resistance	IPX4
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery (included)
Dimensions	78 mm x 65 mm x 46 mm / 3.07 x 2.56 x 1.81 in
Weight	87 g / 3.06 oz (without battery)

iStar

Rechargeable Multi-Function Intelligent Headlamp







* Built-in 1100 mAh rechargeable battery with USB Type-C direct

Design



charging port





Compact, Lightweight



Impact Resistance

Battery Dimensions

Weight

Uniform and flood-lit reading light has no blue light hazard





Built-in 1100 mAh rechargeable battery

70 g / 2.47 oz (without battery)

67 mm x 39 mm x 32 mm / 2.64 x 1.54 x 1.26 in

1 m / 3.28 ft


NEXTORCH



maxStar

Rechargeable High-Output Magnetic-Switching Headlamp





- * Switchable to three brightness levels
- * Rotating 360-degree magnetic dial switch on lamp head allows easy one-
- * Powered by built-in 18650 rechargeable battery with USB Type-C direct charging port



LUMENS



Mode Switch




Pivoting design adjusts USB Type-C Direct Charging through 180-degree range



myStar R/myStar R AA

360-Degree Focus-Adjustable Dual-Battery Headlamp





* Head tilts 60 degrees vertically for accurate light placement

* Powered by either a rechargeable lithium-polymer battery pack (myStar R) or a 3 x AA battery pack (myStar RAA)

Y-shaped headband harness ensures comfort, even when worn for extended periods









Focus-Adjustable Beam Detachable Battery Pack Comfortable Y-Shaped















Model	myStar R	myStar RAA	
Light Source	LED		
Battery	3000 mAh rechargeable battery	3 x AA battery pack	
Modes	760 lm / 245 lm / 28 lm / S.O.S.	600 lm/240 lm/35 lm/S.O.S.	
Runtime	4 h 45 min / 8 h 15 min / 81 h / -	4 h 30 min / 7 h / 55 h /—	
Beam Distance	220 m / 124 m / 42 m / -	180 m / 118 m / 45 m / -	
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Dimensions	Light Body: 74 mm x 40 mm x 44 mm / 2.91 x 1.57 x 1.73 in		
Difficialons	Battery Pack: 76 mm x 28.5 mm x 82 mm / 2.99 x 1.12 x 3.23 in		
Weight	120 g / 4.23 oz (without battery)		

myStar v2.0 360-Degree Focus-Adjustable Rechargeable Headlamp













Focus-Adjustable Beam

USB charging port





Flashing Red Safety Light

* Versatile focus-adjustable design is adaptable to many lighting applications

* Switchable to four modes: Three brightness levels and S.O.S.


* Powered by a built-in rechargeable lithium-polymer battery pack with a Micro

* Y-shaped headband harness ensures comfort, even when worn for extended

Flashing red safety light on battery pack provides enhanced visibility



Comfortable Y-Shaped Harness

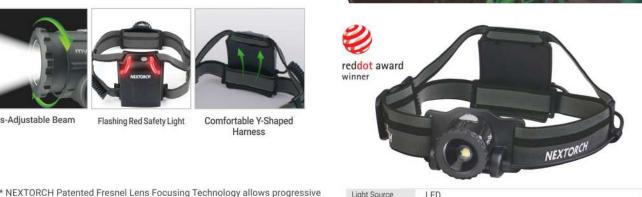

Light Source	LED
Modes	760 lm / 245 lm / 28 lm / S.O.S.
Runtime	4 h 45 min / 8 h 15 min / 81 h / -
Beam Distance	220 m / 124 m / 42 m / -
Water Resistance	IPX4
Impact Resistance	1 m / 3 28 ft

Built-in 3000 mAh rechargeable battery with Micro USB direct charging port Light Body: 74 mm x 40 mm x 44 mm / 2.91 x 1.57 x 1.73 in Battery Pack: 76 mm x 28.5 mm x 82 mm / 2.99 x 1.12 x 3.23 in

175 g / 6.17 oz (with battery pack)

Battery

trekStar Ultra-Bright Multi-Function Headlamp



220 LUMENS

LUMENS





Red LED Preserves Night Vision



Detachable Lamp

Three Color Choices

Lightweight headlamp provides both white light and red-light illumination to preserve your night vision Switchable to five modes: Three white-light brightness levels, red light, and S.O.S.

* Head tilts 100 degrees vertically for accurate light placement * Powered by 3 x AAA batteries (included)

Light module can be detached and used separately





Light Source	1 x White LED and 2 x Red LEDs
Modes	220 lm / 125 lm / 9 lm / Red (2 lm) / S.O.S.
Runtime	2 h 30 min / 9 h / 98 h / 92 h / -
Beam Distance	73 m / 239.50'
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	3 x AAA batteries (included)
Dimensions	55 mm x 38 mm x 32 mm / 2.17 x 1.50 x 1.26 in
Weight	83 g / 2.92 oz (with batteries)

cStar









and red flashing

Neck Light Mode



Headlamp Mode

* Innovative neck band design for comfortable hands-free illumination * COB (Chip-on-Board) light source provides soft flood lighting ideal for reading

* Head tilts 180 degrees vertically for accurate light placement

* Switchable to four modes: Two white-light brightness levels, red beacon,

* Powered by a built-in rechargeable battery with a Micro USB charging port

* Can also be worn as a headband or detached for mounting with optional



180-degree Vertical Adjustment



Light Source	COB			
Mode	High (White)	Low (White)	Red Beacon	Red Flashing
Light Output	170 lm	20 lm	-	22 3
Runtime	2 h	11 h	18 h	
Beam Distance	19 m	7 m	<u>100)</u>	<u>10</u> 07
Water Resistance	1 m / 3.68 ft			
Impact Resistance	IPX4			
Dimensions	60 mm x 46 i	mm x 17 mm /	2.36 x 1.81 x 0).67 in
Weight	64 g / 2.25 o	z (with battery	()	



Lightweight Headlamp and Clip Light





Detachable Lamp for **Easy Transport**



Includes Clip-Style Mount Three Color Choices

and S.O.S.

Lightweight headlamp provides both white light and red-light illumination o preserve your night vision * Switchable to four modes: Two white-light brightness levels, red light,

* Head tilts 180 degrees vertically for accurate light placement Includes multi-function clip mount for attachment to caps, pockets, backpacks, and MOLLE webbing

Powered by 2 x AAA batteries (included)





Light Source	2 x White LEDs and 1 x Red LED
Modes	48 lm / 6 lm / Red (5 lm) / S.O.S.
Runtime	8 h / 49 h / 111 h / -
Beam Distance	16 m / 52.49'
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	2 x AAA batteries (included)
Dimensions	54 mm x 42 mm x 21 mm / 2.13 x 1.65 x 0.83 in
Weight	71 g / 2.50 oz (with batteries)

51

GLO-TOOB is a personal signal light that was conceived in 1996 by Dave Kessel and Lewton Levy after a night SCUBA dive in South Africa. Disappointed with the product they were using at that time because it was unreliable and environmentally unfriendly, they decided to design a signal light specifically for the SCUBA market. Kessel approached NEXTORCH with the idea and, after several years of intensive research, development, and real-world testing, GLO-TOOB was born. Released in 2002, this revolutionary patented personal signal light has not only set a new standard in the SCUBA community, but also earned a devoted following among military, law enforcement, and adventure sports users.


All Rights Reserve

GLO-TOOB



GT-AAA Aurora Signal Light

- · Features red, green, and blue LED light sources
- · Switchable to seven modes: Three constant-on and four flashing
- · Visible from 360 degrees
- IPX8 waterproo
- Designed for use with the GLO-TOOB Tactical Kit (GTK) for mounting to Ops-Core helmets, MOLLE webbing, and other surfaces
- · Powered by 1 x AAA battery (included)






GTK (GLO-TOOB TACTICAL KIT)

- Specifically designed to mount to the ARC rails on Ops-Core helmets
- Base plate allows quick, secure attachment to MOLLE webbing
- Includes hook-and-loop mounting option
- Attaches and detaches in seconds



Dimensions	68.4 mm × 50.3 mm × 27,9 mm
Ring Size	18.8 mm — 19.8 mm
Colors	
Veight	27 g / 0.95 oz
Material	PA + GF



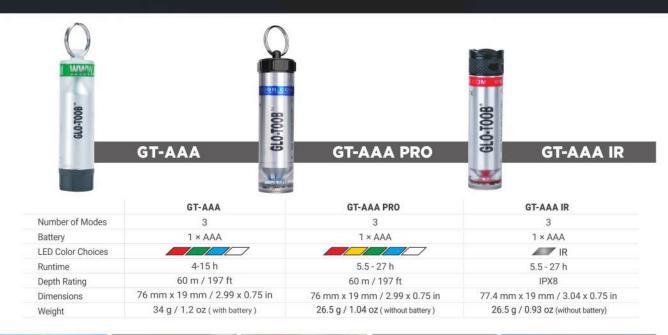

GLO-TOOB



ACCESSORIES ACCESSORIES

ACCESSORIES

Type C Rechargeable Battery

- * Type-C rechargeable for convenient use
- * Features overcharge/discharge protection circuits
- * Charging indicator to show charging status
- * Recycle charging, economical and energy efficient

Battery	21700 Li-ion Battery
Capacity	5000 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	- 20~60 °C
Weight	78 g
Dimensions	Diameter 21.5 mm Height 76.3 mm



Battery	18650 Li-ion Battery
Capacity	3400 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	-20~60 °C
Weight	57 g
Dimensions	Diameter 18.8 mm Height 70 mm



Battery	18650 Li-ion Battery
Capacity	2600 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	- 20~60 ℃
Weight	52 g
Dimensions	Diameter 18.8 mm Height 70 mm



Battery	16340 Li-ion Battery
Capacity	650 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	- 20~60 ℃
Weight	21 g
Dimensions	Diameter 16.8 mm Height 35 mm

Battery	14500 Li-ion Battery
Capacity	880 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	- 20~60 ℃
Weight	21 g
Dimensions	Diameter 14.2 mm Height 50.2 mm



Battery	Rechargeable CR123A
Capacity	650 mAh
Voltage	3.0 V
Charge Time	500 times
Working Temperature	- 20~60 ℃
Weight	18 g
Dimensions	Diameter 17 mm Height 34 mm



Battery	AA Battery
Capacity	1900 mAh
Voltage	1.5 V
Charge Time	500 times
Working Temperature	-20~60 ℃
Weight	21 g
Dimensions	Diameter 14 mm Height 50 mm



Battery	AAA Battery USB
Capacity	440 mAh
Voltage	1.5 V
Charge Time	500 times
Working Temperature	- 20~60 ℃
Weight	9 g
Dimensions	Diameter 10 mm Height 44 mm

Non-direct-charge Rechargeable Battery



Battery 21700 Li-ion Battery Capacity 4800 mAh Voltage 3.6 V Charge Time 500 times Working Temperature -20~60 °C Weight 73 g Diameter 21.5 mm Height 76.3 mm		
Voltage 3.6 V Charge Time 500 times Working Temperature -20~60 °C Weight 73 g Diameter 21.5 mm	Battery	21700 Li-ion Battery
Charge Time 500 times Working Temperature -20~60 °C Weight 73 g Diameter 21.5 mm	Capacity	4800 mAh
Working Temperature -20~60 ℃ Weight 73 g Diameter 21.5 mm	Voltage	3.6 V
Temperature Veight 73 g Diameter 21.5 mm	Charge Time	500 times
Dimensions Diameter 21.5 mm		- 20~60 ℃
Dimensions	Weight	73 g
	Dimensions	



Battery	18650 Li-ion Battery
Capacity	2600 mAh
Voltage	3.6 V
Charge Time	500 times
Working Temperature	-20~60 °C
Weight	52 g
Dimensions	Diameter 18.8 mm Height 70 mm

Disposable Battery



Battery	AA battery
Capacity	2950 mAh
Voltage	1.5 V
Working Temperature	- 18~50 ℃
Weight	24 g
Dimensions	Diameter 14 mm Height 50 mm



Battery	AAA battery
Capacity	1300 mAh
Voltage	1.5 V
Working Temperature	- 18~50 ℃
Weight	12 g
Dimensions	Diameter 10 mm Height 44 mm

Chargers

DC10 UNIVERSAL BATTERY CHARGER * Battery not included



This universal battery charger is compatible with any 5 V USB power source. Its battery compartment extends to accept 10440, 14500, 16340, and 18650 batteries. It can effectively charge batteries that have been overdischarged or stored for extended periods and includes overcharge protection circuitry.



18650 CHARGER KIT

This kit includes a 2600 mAh 18650 rechargeable Li-ion battery, a car charger, and an AC charger. Compatible with the T5, TA30, TA5, PA5, P5 Dual Light, TA40, and TA40 SET.

Flashlight Accessories and Other Items



HM30 Multi-Purpose Handle

Specially designed for the Saint Torch series, this handle provides a comfortable, convenient grip. It also includes threaded holes for mounting to a tripod or for use as a weapon light.



BA30 Fast-Charging Waterproof Li-ion Battery Pack/Power Bank

This battery pack fits the Saint Torch 11 and Saint Torch 30 V2.0 searchlights. It also serves as a power bank to power other devices. It has a built-in USB Type-C port, is IPX7 waterproof to a depth of 1 meter, and is impact resistant and dust-proof. It reaches a full charge in only 3 hours and can be recharged 500 times.

ACCESSORIES ACCESSORIES



Multi-Function Carry Bag

This handy carry bag is made from durable, waterresistant nylon. Its large interior compartment includes hook-and-loop-fastened dividers that allow it to be easily configured to organize your gear. It includes a carry handle, removeable shoulder straps, and external MOLLE webbing for attaching accessory pouches.



Quick-Draw Flashlight Holster

Carry your flashlight so it's instantly accessible with this quick-draw holster. It features a quick-release locking lever and an open-ended design that allows hands-free lighting with the light in the holster. The holster body rotates 360 degrees and locks in 16 positions, so you can orient the light exactly where you want. It works with flashlights with body diameters from 25-32 mm (1.00-1.25 in), fits belts up to 55mm (2.17 in) wide, and mounts on MOLLE webbing.



Adjustable Tension Holster

The unique design of this holster allows you to adjust the tension of the holster body with rubber "O" rings. Its open-bottomed construction holds flashlights bezel-up or bezel-down and fits flashlights with diameters from 27-30 mm (1.06-1.18 in). It mounts to MOLLE and belts up to 55mm (2.17 in) wide and its body rotates 360 degrees.



V10 Nylon Holster

Constructed with durable 1000D Cordura® nylon, this versatile belt holster fits belts up to 80 mm (3.15 in) wide and is compatible with NEXTORCH models P80, P60, TA5, TA40, and T7.



TS41-L **Tactical Remote Switch**

This waterproof pressure switch allows the remote activation of weapon-mounted lights while maintaining your firing grip. It provides both constanton and momentary activation and is compatible with our T7, T5G, T53, TA4, and TA40 flashlights.



FT32 Color Filter Kit

Increase the versatility of your flashlight with these high-quality colored filters. This kit includes three colored filter lenses (red, green, and blue) and a slip-on filter mount that is compatible with our TA40, TA3, T6A, T5, PA5, and P60 flashlights.



The unique design of this holster allows you to adjust the tension of the holster body with rubber "O" rings. Its open-bottomed construction holds flashlights bezel-up or bezel-down and fits flashlights with diameters from 27-30 mm (1.06-1.18 in). The holster body rotates 360 degrees and locks in 16 positions. Its versatile mount fits belts up to 55mm (2.17 in)




Tactical Polymer Holster

Quick-Draw Flashlight Holster

wide and mounts to MOLLE webbing.

This versatile holster features a quick-release locking lever and an open-ended design that allows handsfree lighting with the light in the holster. The holster body rotates 360 degrees and fits flashlights with a body diameter of 25 - 32 mm (1 - 1.25 in). Designed for carry on belts up to 50 mm (2 in) wide.



FR-1 **Tactical Flashlight Ring**

This innovative accessory enhances your capabilities when using your flashlight in tactical or self-defense situations. It functions as a deep-pocket carry clip, yet provides a quick draw and improved retention. It also works with a variety of low-light shooting positions and can even be used as a striking tool at close quarters. Available in three colors, it fits flashlights with tail cap switches and body diameters of 23.2-25.5 mm (0.91-1.00 in), including the TA30, TA01, and E6.



This holster was specifically designed to fit NEXTORCH's TA30 and TA01 flashlights with the FR-1 Tactical Flashlight Ring. It fits belts up to 55mm (2.17 in) wide and mounts to MOLLE



Nylon Holster

This versatile nylon holster fits NEXTORCH models TA30, TA15, TA5, PA5, DUAL LIGHT, TA40, T6A, myTorch S, and myTorch S XL. It mounts vertically on a belt and features a hook-and-loop-secured protective flap.



FR-2 **Tactical Flashlight Ring**

Enhance your capabilities when using your flashlight in tactical or self-defense situations with this innovative flashlight ring. It functions as a deep-pocket carry clip, yet provides a quick draw and improved retention. It also supports many low-light shooting positions and can even be used as a striking tool at close quarters. Available in three colors, it fits flashlights with tail cap switches and body diameters of 25-27 mm (0.98-1.06 in), including the TA30 MAX and TA5.



V40 Multi-Tool and Flashlight Leather Holster

Made of premium leather, this holster holds both a flashlight and a multi-tool. Its belt slots accommodate belts up to 55 mm (2.17 in) wide and can be worn in two ways, with the tools oriented vertically or horizontally.



TRAFFIC WAND

Designed to fit flashlights with head diameters of 33-38 mm (1.30-1.50 in), this accessory transforms a flashlight into an illuminated traffic



Waterproof Bicycle Signal Light

Make sure drivers can see you when you are riding your bicycle with this high-visibility signal light. It easily attaches to any bicycle with the included hook-and-loop fasteners and offers both slow and fast red & blue flashing modes.

Helmet Flashlight Mount



Helmet Flashlight Mount

This versatile mount quickly attaches to any helmet with two threaded knobs. The mount body rotates 360 degrees and fits flashlights with body diameters of 18-35mm (0.71-1.38 in).



Lightweight Multi-Angle Flashlight Mount

This versatile mount easily attaches to helmets and other surfaces with double-sided 3M adhesive strip. The light holder rotates 360 degrees and fits lights with body diameters of 22-30 mm (0.87-1.15 in).



Headlamp Helmet Clip

This injection-molded nylon clip allows NEXTORCH headlamps to be securely mounted on most helmets. The clip attaches to the headlamp strap and then hooks under the edge of



RM25S Tactical Picatinny Light Mount

This precision-machined mount allows any flashlight with a body diameter of 22-26.5 mm (0.87-1.04 in) to be easily attached to a firearm with a Picatinny rail.



Quick Attach/Detach Scope Mount

Mount any flashlight with a body diameter of 20-28 mm (0.79-1.10 in) to a firearm scope with this quick-mount clamp. It installs without tools and fits scopes with tube diameters of 25.6-30 mm (1.00-1.18 in)



RM85S Universal Tactical Mount

Mount any flashlight with a body diameter of 23-28 mm (0.91-1.10 in) to a long-gun barrel with this quick-mount clamp. It installs without tools and fits guns with barrel diameters of 25.6-30 mm (1.00-1.18 in)



RM87 Magnetic Universal Mount

Fits flashlight body size: 23 mm-26.5 mm (0.91"-1.04")



BM1

Fits flashlight body size: 23 mm - 28 mm (0.9"-1.1"); fits steel pipe size: 22 mm-25.6 mm (0.87"-1.0")



Bike Flashlight Mount

NEX BATON



NEX is a division of NEXTORCH dedicated to designing and manufacturing the world's fines tactical batons. The heart of every NEX baton is our innovative NEX Lock—a precision-machined mechanism that locks the baton's sections rigidly open when the baton is extended yet allows it to be easily closed with the press of a button. Manufactured to exacting tolerances from the finest materials, NEX batons set a new standard in tactical baton quality and reliability.





Smooth Extension & Retraction



Locking



Impact Resistance

QUICKER SERIES Expandable Duty Baton Series



BATON FLASHLIGHT SERIES



WALKER Portable Baton Series



WALKER Leather Handle Portable Baton







Expandable Duty Baton Series

FEATURES

- State-of-the-art NEX Lock mechanism locks the baton rigidly open and easily withstands for force of full-power blocks, strikes, and thrusts
- Tail cap lock release button allows easy, one-handed closing of the baton
- Built with premium all-steel or steel & aerospace aluminum "air" construction for extreme durability and reliability
- $\bullet \ \mathsf{Extended} \ \mathsf{tip} \ \mathsf{design} \ \mathsf{allows} \ \mathsf{two-handed} \ \mathsf{manual} \ \mathsf{deployment} \ \mathsf{or} \ \mathsf{conventional} \ \mathsf{inertial} \ \mathsf{opening}$
- · Optional tip with nanoceramic striker provides glass-breaking and window-breaching capability



NEX 17" NEX 21" NEX 21" NEX 23" NEX 26" NEX 28" NEX 39" (Air/Steel) (Trainer) (Air/Steel) (Steel) (Steel)

Specifi	ications	NEX 17" (Air)	NEX 21" (Air / Trainer)	NEX 23" (Air)	NEX 21" (Steel)	NEX 23" (Steel)	NEX 26" (Steel)	NEX 28" (Steel)	NEX 39" (Air)
Exte	ended	17" (413 mm)	21" (509 mm)	23" (584 mm)	21" (503 mm)	23" (584 mm)	26" (660 mm)	28" (712 mm)	39" (1003 mm)
Retr	acted	7.56" (192 mm)	8.82" (224 mm)	9.80" (250 mm)	8.58" (218 mm)	9.80" (250 mm)	10.82" (275 mm)	11.5" (292 mm)	12.63" (321 mm)
We	eight	≤ 9.52 oz (270 g)	≤ 11.11 oz (315 g)	≤ 12.35 oz (350 g)	≤ 18.76 oz (532 g)	≤ 21.16 oz (600 g)	≤ 23.63 oz (670 g)	≤ 25.39 oz (720 g)	≤ 25.57 oz (725 g)
Numerical	Body	Alloy Steel + Aerospace Aluminum Alloy Steel				Alloy Steel			
Material	Handle		TPE Rubber				Alloy Steel		
Impact F	Resistance				2 m / 6.56	ft			

N19L Quicker

Flashlight Expandable Baton





FEATURES

- Combines a tactical flashlight and an expandable baton into a single tool
- High-performance LED produces a maximum output of 410 lm
- · Switchable to three modes: Two brightness levels and a strobe
- · Rotating dial switch for easy one-handed mode selection
- High-strength NEX Lock locking mechanism
- Baton tip includes a nanoceramic glass breaker









Light Source	LED	
Modes	410 lm / 40 lm / strobe	
Runtime	1 h 30 min / 9 h / —	
Beam Distance	116 m / 35 m / —	
Waterproof	IPX8 (2 m)	

Battery	1 x 14850 rechargeable battery (included)
Weight	350 g / 12.34 oz (without battery)
Body Material	Alloy steel and aerospace aluminum
Retracted Length	270 mm
Expanded Length	490 mm

ACCESSORIES

TB1 Tonfa Side Handle



Material	Aluninum alloy (Connection part) + POM (Handle body)
Finish	Type III Hard Anodizing
Dimensions	155 (length) x 36 (Width) x 44 (Height) mm
Compatible Batons	NEX Quicker Series Batons

HG1 Baton Crossguard



Material	Aerospace Aluminum Alloy	
Surface Treatment	Type III Hard Anodizing	
Weight	65 g / 2.29 oz	
Dimensions	108 mm × 108 mm × 37 mm	
Compatible Batons	NEX Quicker Series Batons, or batons with a diameter ranging from 26-27 mm	



FEATURES

- Compact expandable batons designed for discreet concealed and undercover carry
- Spring clip allows comfortable, convenient carry without a holster
- Innovative NEX Lock mechanism locks baton securely when expanded
- Tail cap release button allows easy one-handed closing
- Baton tip includes a nanoceramic glass breaker



Easily Carried and Concealed



Impact Resistance	2 m / 6.56 ft			
Material	А	Alloy Steel		
Weight	≤ 6.35 oz (180 g)	≤ 7.41 oz (210 g)	≤ 8.82 oz (250 g)	≤ 13.23 oz (376 g)
Retracted	6.22" (158 mm)	7.52" (191 mm)	8.82" (224 mm)	7.52" (191 mm)
Extended	12" (302 mm)	16" (401 mm)	20" (500 mm)	16" (401 mm)
SPECIFICATIONS	NEX 12" (Air)	NEX 16" (Air)	NEX 20" (Air)	NEX 16" (Steel)



NEX16"/20"

Leather-Handled Concealable Batons

- * State-of-the-art NEX Lock mechanism locks the baton rigidly open and easily withstands for force of full-power blocks, strikes, and thrusts
- * Tail cap lock release button allows easy, one-handed closing of the baton
- * Built with premium all-steel or steel & aerospace aluminum "air" construction for extreme durability and reliability
- * Comfortable, non-slip leather-covered grip
- * Spring steel clip for concealed carry
- * Tip includes nanoceramic striker for glass-breaking and window-breaching capability







Specifications	NEX 16" (Air)	NEX 20" (Air)	NEX 16" (Steel)
Extended	16" (401 mm)	20" (500 mm)	16" (401 mm)
Retracted	7.52" (191 mm)	8.82" (224 mm)	7.52" (191 mm)
Weight	≤ 7.41 oz (210 g)	≤ 8.82 oz (250 g)	≤ 13.23 oz (376 g)
Material	Alloy Steel + Aero	ospace Aluminum	Alloy Steel
Impact Resistance		2 m / 6.56 ft	

N18L Wal / N15L Wal

Self-defense Portable Baton with flashlight



410 LUMENS



FEATURES

· Combines a tactical flashlight and a concealable expandable baton into a single tool

· Rotating dial switch for easy one-handed mode selection

• Spring clip allows comfortable, convenient carry without a holster

· High-strength NEX Lock locking mechanism

· Baton tip includes a nanoceramic glass breaker



Specifications	N18L Wal	N15L Wal
Light Source	LED	LED
Modes	410 lm / 40 lm / strobe	100 lm / strobe
Runtime	1 h 30 min / 9 h / —	1 h 15 min / —
Beam Distance	116 m / 35 m / -	60 m / -
Waterproof	IPX8 (2 m)	IPX8 (2 m)
Battery	1 x 14850 rechargeable battery (included)	1 x AA battery (included)
Weight	260 g / 9.17 oz (without battery)	202 g / 7.12 oz (without battery)
Body Material	Alloy steel and aerospace aluminum	Aerospace aluminum
Retracted Length	265 mm	235 mm
Expanded Length	480 mm	378 mm





N14 Wal

Concealable Two-Section Expandable Baton





FEATURES

- · Ultra-compact, concealable two-section design
- Spring clip allows comfortable, convenient carry without a holster
- · High-strength NEX Lock locking mechanism · Aerospace-grade aluminum handle section has machined texture
- grooves for a secure grip · Striking section is precision machined from steel for maximum striking
- · Baton tip includes a nanoceramic glass breaker

Retracted Length	14" / 356 mm
Expanded Length	8.66* / 220 mm
Handle Diameter	16 mm
Weight	≤ 5.53 oz / 157 g
Material	Alloy steel and aerospace aluminum
Impact Resistance	2 m / 6.56 ft





ACCESSORIES

V70

Dual-Purpose Holster

- · Compatible with Batons & Flashlights
- · Supporting 360 degree rotation and 16 angles of fixation
- · Available for both quick & non-rapid extraction of batons

Nylon MOLLE-Mount Baton Holster


Compatible Batons	NEX Quicker Series Batons
Applicable Flashlight Head / Tail Dia.	25 - 32 mm
Fitting Belt Size	≤ 50 mm
Dimension	65.4 mm x 50 mm x 134.6 mm





· Made of high-quality 1000D nylon fabric, for high wear resistance and tear • Designed for the close carry of baton by applying MOLLE mount, able to be mounted on the tactical waistcoat, backpack, waist belt or other





equipments with MOLLE webbings, convenient and practical



- · designed for duty to close carry and draw faster
- supporting 360° degree rotation and 16 angles fixation
- · compatible with various size of batons, supplying adjustable clamp to attach holder on belt more stably

Compatible Batons	NEX Quicker Series Batons	
Dimension	137 mm x 56.5 mm x 65 mm	
Weight	96 g / 3.38 oz	









V73

Baton and Flashlight Holster

- · Works with NEX Quicker Series batons with HG1 crossguard
- 360° rotatable with 16 locking positions
- · Compatible with flashlights or batons with a diameter of 25 32 mm, belts less than 55 mm in width and MOLLE system.

Compatible Batons	NEX Quicker Series Batons	
Compatible Flashlights	25 - 32 mm (Head Dia.)	
Compatible Belt Width	≤ 55 mm	
Dimensions	156 mm × 54 mm × 65 mm	

V67

Leather Baton Holster

- · Made of genuine leather, lightweight and durable
- · For NEX Quicker series batons
- · Compatible with belt up to 50 mm wide
- · Ideal for plainclothes carry

Material	Genuine Leather
weight	63 g / 2.22 oz
dimensions	180 × 110 × 35 mm
belt width	Width ≤ 50 mm; Thickness ≤ 6 mm
Compatible Batons	NEX Quicker Series Batons





NEX

V68

Leather Concealable Baton Holster

- · Made of genuine leather, lightweight and durable
- · For NEX Walker series batons
- · Compatible with belt up to 50 mm wide
- · Ideal for plainclothes carry

Material	Genuine Leather
weight	55 g / 1.94 oz
dimensions	155 × 84 × 29 mm
belt width	≤ 1.77" mm
Compatible Batons	NEX Walker Series Batons





V69

Nylon MOLLE-Mount Concealable Baton Holster

- · Made of nylon material
- Design for NEX Walker batons (16" / 18" / 20")
- · Able to be mounted on the tactical waistcoat, backpack, waist belt or other equipments with MOLLE webbings, convenient and stable

Material	1000D Nylon Fabric	
weight	45 g	
dimensions	180 × 40 × 40 mm	











Non-locking Function for Ease of Training

Double-Lock Mode Achieves
True Locking Function



* Purpose-designed training handcuffs for maximum ease-of-use during officer training

- * Special mechanism allows keyless unlocking in single-lock mode * Double-lock mode provides true locking functionality, if required
- * Made of aerospace-grade aluminum

Weight	235 g / 8.29 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Length	242 ± 2 mm
Keys Included	2
Corrosion Resistance	Level 10







High-Security Three-Tooth Ratchet Pattern

Double-Sided Keyway



* Double-Lock feature for enhanced subject and officer safety
* Unique three-tooth ratchet pattern prevents shimming

* Made of aerospace-grade aluminum
 * Double-sided keyway allows unlocking from both sides of cuff body

Weight	255 g / 8.99 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Keys Included	2
Impact Resistance	3 m
Corrosion Resistance	Level 10







Double-Hinge Design

Optional Nylon Handcuff Pouch



- * Double-hinged design for maximum restriction of subject movement
- * Double-Lock feature for enhanced subject and officer safety
- * Unique three-tooth ratchet pattern prevents shimming
- * Made of aerospace-grade aluminum
- * Double-sided keyway allows unlocking from both sides of cuff body

Weight	284 g /10.01 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Keys Included	227 ± 3 mm
Length	2







Dual Retention (Snap and Hookand-Loop) Holds Cuffs Securely




Belt Clip Allows Easy Attachment and Removal



- * Compatible with all handcuff styles
- * Retention strap features both a snap and hook-and-loop closure for added security
- * Made of tough 1000D nylon
- * Belt clip allows easy attachment and removal

Material	1000D DuPont™ nylon	
Belt Size	≤ 55 mm	
Dimension	137 mm x 109 mm x 50 mm	
Weight	85 g / 3.0 oz	

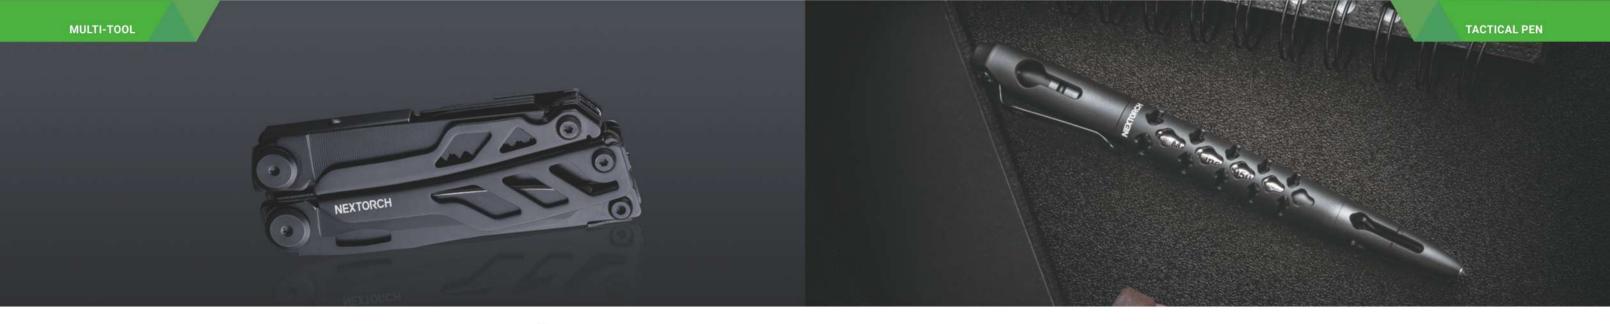

MT 10

16-in-1 Multi-Tool



Multi Functions

- Meedlenose Pliers
- Regular Pliers
- Premium Replaceable Wire Cutters
- Premium Replaceable Hard-wire Cutters
- Thick-wire Cutters
- **6** Saw
- M Knife
- Phillips Screwdriver

- Rescue HookCan Opener
- Wire Stripper
- Bottle Opener
- Flat Screwdriver
- Glass Breaker
- Ruler

Scissors

Key Features

- Large, full-function scissors with 30 mm (1.18 in) blades
- Ultra-hard nanoceramic glass breaker
- Versatile plier design combines five different functions
- High-performance wood saw with two rows of teeth
- ${\boldsymbol{\cdot}}$ Rescue hook for cutting line, seat belts, and webbing



Body Material	30Cr13
Pliers Jaws	30Cr13
Blade Material	50Cr15MoV
Wire-Cutter Blades	K30 (YG8)
Surface Finish	Saw/Scissors: Satin Finish All Others: Bead Blast Finish
Dimension	Close: 110 mm × 40 mm × 21.5 mm
Weight	245 g ± 5 g



NP20

Tactical Pen with Tungsten-Steel Strike Tip

The ultimate in low-profile personal-defense tools, this stylish pen is precision machined from 6061-T6 aerospace-grade aluminum and features a tungsten-steel strike tip. Its body has a Type II hard anodized finish and a machined "dragon bone" texture for a secure, non-slip grip. The tungsten-steel strike tip allows it to deliver focused impact against an attacker and also functions as an emergency glass breaker. Weighing only 30 g (1.06 oz), this precision writing instrument includes a SCHMIDT Megaline P 950 M ink cartridge.



Body Material	6061-T6 Aerospace Grade Aluminum	Cartridge	SCHMIDT Megaline P 950 M (G2 Specs)
Body Finsih	Mil-Spec Type III Hard Anodized	Length	148 mm / 5.8"
Strike Tip Material	Tungsten-steel	Weight	30 g / 1.06 oz (Refill Included)





TEX10

Multi-Function MOLLE Tactical Belt





Double-Layered MOLLE Webbing



- * Precision-machined aluminum buckle with a 200kg (441 lb) break strength
 * Two-step buckle-release mechanism for added security
 * Double-layer construction features an inner belt and an outer load-bearing
- platform
- * High-strength hook-and-loop bond between layers

 * MOLLE exterior allows easy attachment of holsters, pouches, and accessories

 * Fully adjustable inner belt to fit a wide range of waist sizes

 * Comfortable, breathable honeycomb lining

Material	Inner Belt and Outer MOLLE Platform: Ballistic Nylon
	Buckle: Aerospace aluminum
	Inner Belt: 5 cm (2.0 in) wide x 155 cm (61 in) long (fully adjustable length)
Dimensions	Outer MOLLE Platform: 8 cm (3.2 in) x 95 cm (37.4 in) long
Waist Sizes	Adjustable from 85 - 145 cm
Weight	550 g / 19.4 oz

Belt Accessories

V12

Quick-Draw Nylon Handcuff Case

Dimensions	109 mm × 136 mm × 64 mm
Belt Width	≤55 mm
Weight	145 g
Material	Nylon, PA + GF



- * Dual retention (snap and hook-and-loop) holds handcuffs securely
- * Multi-function mount attaches to belts up to 55 mm (2.17 in) wide and MOLLE webbing
- * Includes a nylon key pocket with hook-and-loop closure





V13

Quick-Draw Utility Pouch

Dimensions	150 mm × 80 mm × 170 mm
Belt Width	≤55 mm
Weight	220 g
Material	Nylon, PA + GF

* Two large compartments for storage of critical items
* Zippered main compartment is divided for easy organization

- and instant access
- * Multi-function mount attaches to belts up to 55 mm (2.17 in) wide and MOLLE webbing



Quick-Draw Radio Case

Dimensions	75 mm × 75 mm × 150 mm
Belt Width	≤55 mm
Weight	165 g
Material	Nylon, PA + GF

* Universal design fits a broad range of radios

- * One-handed size adjustment
- * Durable nylon construction
- * Fits radios up to 73 mm (2.90) wide, 73 mm (2.90 in) thick, and 150 mm (5.91) tall





V21

Pepper Spray Holster

Dimensions	140 mm × 60 mm × 79 mm
Belt Width	≤55 mm
Weight	126 g
Material	Nylon, PA + GF

- * Accommodatespepper spray canisters 31-38 mm (1.22-1.50 in) in diameter
- * Quick-release locking lever provides both secure carry and rapid one-handed deployment
- * Holster body rotates 360 degrees and locks in 16 positions



Tactical Baton Holster

Dimensions	156 mm × 40 mm × 26 mm
Belt Width	≤55 mm
Weight	120 g
Material	PA + GF

- * Works with NEX Quicker Series batons with HG1 crossgurad
- * 360° rotation with 16 locking positions
- * Compatible with flashlights or batons with a diameter of 25-32 mm





V51

Tactical Flashlight Holster

Dimensions	130 mm × 54 mm × 76 mm
Belt Width	≤55 mm
Weight	114 g
Material	PA + GF

- * Compatible with flashlights and batons with a diameter of 25-32 mm (0.98-1.26 in)
- * Quick-release locking lever provides both secure carry and rapid one-handed deployment
- * Allows hands-free use of the flashlight while secured in the holster * Holster body rotates 360 degrees and locks in 16 positions


















MOLLE System

- * Versatile 18-liter backpack for tactical and EDC use * Designed to accept optional stab-proof polycarbonate plate to protect
- against edged-weapon attacks
- Made with durable, waterproof 1000D nylon fabric
- * Internal multi-pocket admin compartment and dedicated concealedcarry panel
- Advanced strap design and ventilated back panel for enhanced comfort Wrap-around MOLLE webbing for easy attachment of pouches and accessories

Volume	18 L	
Dimensions	470 x 320 x 120 mm	
Weight	1833 g / 64.6 oz	
Material	1000D Cordura Nylon	

Pouches

COMMUTER BAG

Volume	7 L
Material	1000D Cordura Nylon
Dimensions	325 mm × 290 mm × 90 mm
Weight	542 g

- * Handy, multi-purpose design for EDC use * Made with durable, waterproof 1000D nylon fabric
- * Two separate internal compartments for ample storage * MOLLE webbing on the front and rear allows easy attachment of pouches and accessories
- * Zipper pulls for easy access, even when wearing gloves





EQUIPMENT BAG

Volume	6.5 L
Material	1000D Cordura Nylon
Dimensions	225 mm × 290 mm × 120 mm
Weight	626 g

- * Multi-purpose design for EDC use and concealed carry
- * Made with durable, waterproof 1000D nylon fabric
- * Large main compartment with multi-pocket admin panel
- * Two outside pockets include a CCW compartment with hook -and-loop panel
- * MOLLE webbing outside pockets allows easy attachment of pouches and accessories
 * Zipper pulls for easy access, even when wearing gloves
- * Shoulder strap includes pouch for tool storage

STORAGE/HELMET BAG

Volume	10 L
Material	1000D Cordura Nylon
Dimensions	320 mm × 255 mm × 130 mm
Weight	365 g

- * Multi-purpose design for general storage or use as a helmet bag
- * Made with durable, waterproof 1000D nylon fabric * Hook-and-loop closures and external accessory straps
- * Folds flat for easy storage







BOTTLE POUCH

Material	1000D Cordura Nylon
Dimensions	255 mm × 110 mm × 80 mm
Weight	117 a

- * Easily attaches to bags and packs
- * Breathable mesh design
- * Exterior MOLLE webbing
- * Adjustable drawstring

STAB-PROOF POLYCARBONATE PANEL

Material	PC
Dimensions	450 mm × 290 mm × 5 mm
Weight	703 g

* Durable, lightweight panel for the TEX 20 Tactical Backpack provides protection against stabbing and cutting attacks





TEX30

Tactical Gloves
















78

- Made of synthetic leather and microfiber fabric for maximum comfort
- Impregnated with antibacterial and odor-controlling nano-silver ions * Capacitive synthetic suede fingertips for use of touchscreen devices
 * Non-slip, silicone-coated palm and finger panels
 * Adjustable thermoplastic rubber (TPR) wristband

24.5	Hara Carrana Anna	
size	S/M/L/XL/XXL	
Material	Synthetic Leather + Microfiber Fabric	

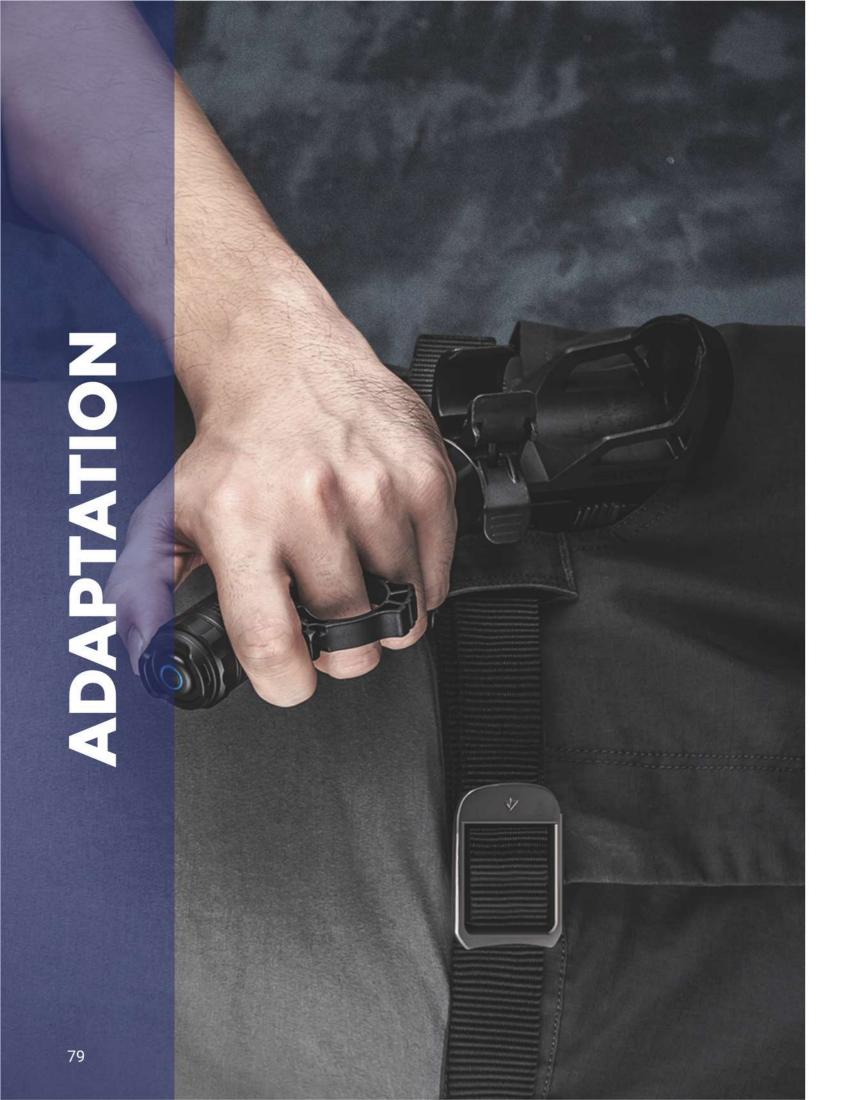

	ard Others	TB1 Grip Ring Window -Break Tip SL6	Y	>	>	>	>	>	7	>	۲	> > >	> > >	> > >	>	>	>	>	>	7	>	^
	Crossguard	HG1									^	>	>	>	À	>	>					
ally states.	Handcuffs Case	V12																		>	>	>
TOOL SERIES	Hanc	V11																		>	>	>
		٧40	>	>	>		>											>	>			
MOT &		69/	>	>	>	>	>	>	>	>												
NEX BATON	k	N68		>	>	>	>	>	>	>												
2	Baton Holster	797										>	>	>								
	Baton	٧٧٥									>	>	>	>	>	>						
		177									>	>	>	>								
		V72									>	>	À	>								
		V73									>	>	>	>	>	>	>					
	Products		NEX 14"	NEX 12"	NEX 16"	NEX 20"	NEX 16" Leather Handle	NEX 20" Leather Handle	NEX 15" With Flashlight	NEX 18" With Flashlight	NEX 19" With Flashlight	NEX 17"	NEX 21"	NEX 23"	NEX 26"	NEX 28"	NEX 39"	NP20	MT10	HC10	HC11	HC20
	Ā					WALVED	WALNER							QUICKER				COL	- 00		HAND - CUFFS	

	-																			
	Others	SL6	>	>	>	>	>	>	>	>	>	>	>	>	>	>	>	>	>	>
	of to	Traffic																		
	GTK	GTK																		
	Bike Mount	BM1														>	>	>	>	>
	clip	HW3																		
	attery H	BA30		>	>															
	Handle Battery Helmet Mount Pack Clip	НМ30 В	>	>	>															
	USB Ha Charger Mc	DC10 HA	-			>	>		>		>		>	>					>	
	ote US										12.									
	Filter Switch	2 TS41-L					>		>				>							>
	Filte	7 FT32																		
	ŧ	RM8																		>
	t Mou	RM85S																		>
	Flashlight Mount	RM85																>		
	Œ	FR-1 FR-2 RM25S RM85 RM85S RM87																>	>	
	бı	-R-2 R														>	>			>
ES	Tactical Ring	- E													>			>	>	
FLASHLIGHT SERIES	Tact	FR-1 MAX													>			>	>	
		V40																>	>	
		V10 V1														>	>	>	>	>
	<u> </u>	V31 V.													>			>	>	
FLA	Flashlight Holster	V70														>	>	>	>	>
	shlight	V73														>	>	>	>	>
	臣	51 V5														> >	> >	> >	>	>
		V6 V51																>	>	<i>-</i>
																		>	>	
		uilt-in	>	>	>					>		>								
		AAA B																		
		¥.																		
	>	R123A				>	>	>	>		>		>	>	>			>	>	
	Battery	4500 C																		
		340 1							>		>		>	>	>					
		650 16				>	>		058		35			::5	579			>	>	
		21700 18650 16340 14500 CR123A AA AAA Built-in V61				5														_
		217	2	30	Ε						œ					> ×	>			>
		Products	SAINT TOECH 31	SAINT TOECH 30	SAINT TOECH 11	WL60	WL50IR	WL30	WL23R/G	WL22R/G	WL21R/G/IR	WL14	WL13	WL11	TA20	TA30C MAX	TA30 MAX	TA30C	TA30 V2.0	TA41
		<u>a</u>		SAINT						W SERIES								۲	SERIES	

			Battery	tery					ш	lashlig	Flashlight Holster	ster			-	Tactical Ring	Ring		Flashlight Mount	nt Mour		Filter	Switch	Filter Switch Charger	Handle	Battery Pack	Handle Battery Helmet Mount Pack Clip	Bike	GTK	Others
8	8	21700 18650 16340 14500 CR123A AA AAA Built-in V61	14500	1 CR1234	A AA	AA Built-ir	n V61	9	V51 V	V5 V7	3 V70	V73 V70 V31 V10		5	V40 FR-1 MAX		1 FR-2	RM25	FR-1 FR-2 RM25S RM85 RM85S RM87	RM85S		FT32 TS41-L	TS41-L	DC10	HM30	BA30	HW3	BM1	T Y	Traffic
- >	>								>	>	>		>				>											>		
		>	>	>	>		>	>			>	>		>	>	>		>	>		>			>				>		
	825	>		>					>	>	>							>	>	>	>		>	>				>		
>	>								>	>	>									>	>		>					>		
		>		>					>	>	>							>	>	>	>	>	>	>				>		
	**	>		>					>	>	>									>			>	>				>		
		>		>					>	>	>								>	>			>	>				>		
>									>	>	>									>	>		>	>				>		
	2.00	>		>					>	>	>			>					>	>	>	>	>	>				>		
>	_								>	>	>		>															>		>
>	_																						>							
	0.65	>							>	>	>		>															>		>
\rightarrow	_								>	>	>		>															>		
>	_								>	>	>		>															>		>
	3600	>							>	>	>		>											>				>		>
						>	>	>							>															
		>					>	>	>	>	>	>			>		>							>						
	- "	>		>																				>						
	10	>		>					>	>	>			>					>					>				>		

	SL6	>		>	>	>	>													
Others	Traffic St Wand			E.	5	6														
GTK	GTK Tra							>	>	>										
Bike Glount	BM1	>		>	>															
olinet Olip N																				
attery H	A30 H																			
andle Br	M30 B																			
38 Hz arger M	01: H	>			>															
ose Us	14. DQ	alir			7.0															
Filter Remote USB Handle Battery Helmet Bike Switch Charger Mount Pack Clip Mount	FR-1 FR-2 RM25S RM85 RM85S RM87 FT32 TS41-L DC10 HM30 BA30 HM3																			
Ē	78 FT	>																		
ount	5S RM																			
Flashlight Mount	5 RM8																			
Flashli	SS RM8	>																		
	2 RM2																			
l Ring	- E			>																
Tactical Ring	T. X																			
	740 FR				>	>	>													
	5																			
10	/31	>		>	>															
Flashlight Holster	V5 V73 V70 V31 V10 V1 V40	>		>																
shlight	5 V73	>		>																
Ĕ	V51 VE	>		>																
	9				>															
	n V61				>															
	Built-i										>	>	>	>	>	>	>			
	A AAA						_	>	>	>								>	>	_
	23A A	>				>	>													>
Battery	21700 18650 16340 14500 CR123A AA AAA Built-in V61																			
m	40 145																			
	50 163																			
	00 186	>			>															
	217			>						0										
	Products	PA5	ND20	E52C	E51C	C2 UV	C1/2	GT-AAA Aurora	GT-AAA IR	GT-AAA PRO	UT41	UT31	UT30	UT22	UT21	UT11C	UT10C	UL12	UL11	UL360
	ž	۵	SERIES	ш	SERIES	ပ	SERIES		Signal Light						ם	SERIES				

Others	SL6										>	>	>		>	>	>
	Traffic																
GTK	STK																
Bike GTK Mount	BM1																
clip	HW3	>		>	>	>	>										
Handle Battery Helmet Mount Pack Clip	BA30																
andle E	HM30																
Charger N	DC10 H	>		>													
Remote U Switch Ch	TS41-L D	200															
Filter Swi	FT32 TS4																
Ē	87 FT																
ount	5S RM																
ght Mc	5 RM8																
Flashlight Mount	FR-1 FR-2 RM25S RM85 RM85S RM87																
	RM25																
Ring	1 FR-2																
Tactical Ring																	
_	40 FR-1 MAX																
	V1 V40																
	V31 V10														>	>	>
Flashlight Holster	70 V3																
light F	V73 V70																
Flash	٧5																
	V6 V51																
	.9A u																
	21700 18650 16340 14500 CR123A AA AAA Built-in V61		>		>		>		>					>	>		
	AAA							>		>	>	>	>			>	>
	A AA				>	>											
<u> </u>	3R123																
Battery	1200 (
	40 14																
	0 163																
	1865	>		>													
	21700																
5	SIS	oStar	iStar	maxStar	myStar R	H myStar R AA SERIES	myStar V2.0	ECO STAR	C STAR	TREK STAR	Dr.K3S	Dr.K3L	Dr.K3 UV	K40	K3RT	КЗТ	K3 V3.0
1	Products				E	S J	Ę	Щ		Ĕ			0	S			(456)
	***************************************					H								S SERIES			